




Product Specification

COB LED Flexible Strip

LCE COB-CV12/24608-CCT-P10-E



COB LED strip is designed for spots-free led linear lighting, suitable with any kinds of led profile and silicon tube.



Feature


- 1.Dots-free with uniform lighting
- 3.Cutttable and solderless connection with crystal connector



Light Source

wire inside chips	99.99% purity golden (1.0um or above diament)
chip size	big size chip with high output lumen
phosphor powder	Mitsubishi or Intermatrix phosphor powder
chip brand	Epistar or brand chip
LED lead frame	100% purity copper LED lead frame
PCB	35U cooper PCB/ double side PCB/ back side of PCB is protection layer
Bin code	one order, one small BIN Code only, and LCE can promise you sereral orders from same one Bin
3M tape	300P genuine 3M tape /3M VHB tape
age testing	LCE strip take at least 8hours aging-test
QC Checking	3 times QC checking(SMT + PCB jointing+ after aging testing) before packing

Technical Drawing

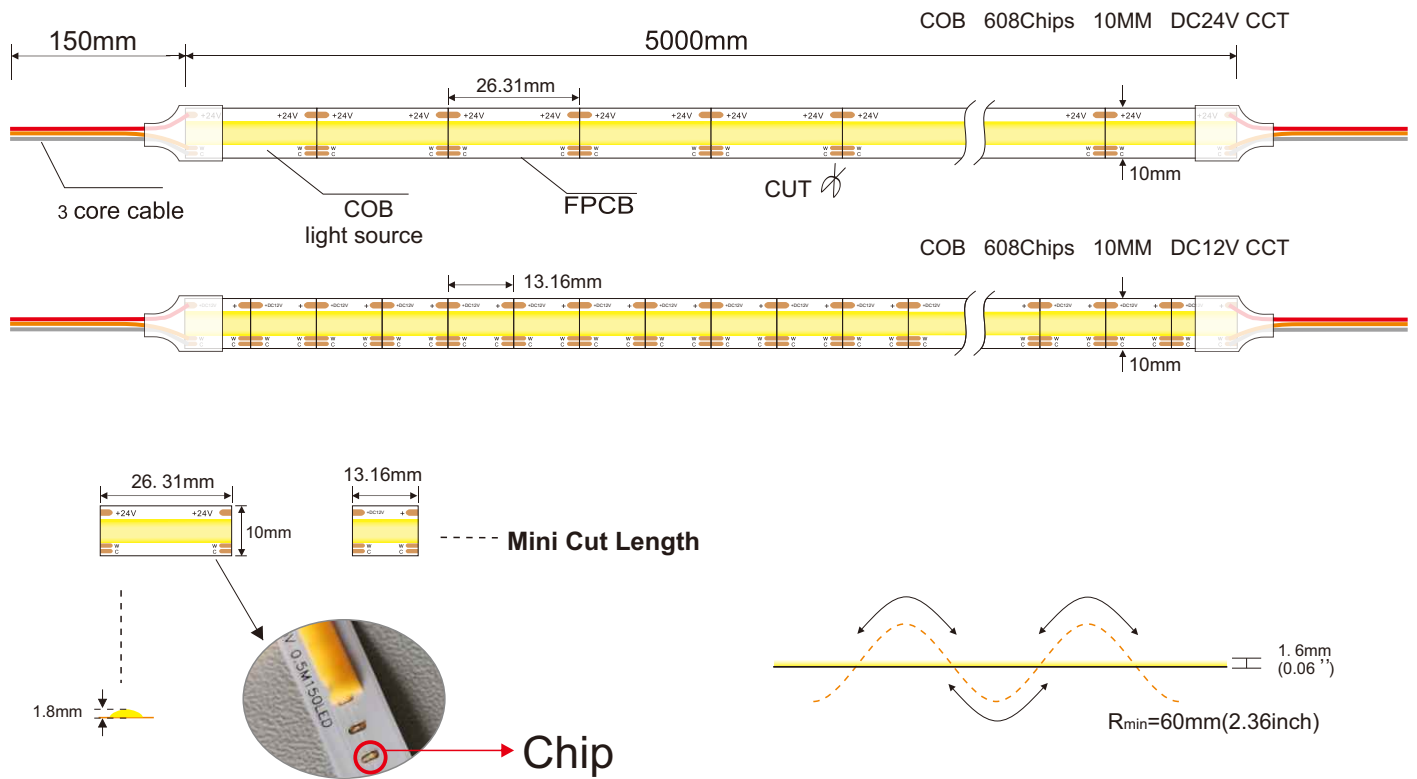

Basic Parameter


P/N	LED QTY (PCS/M)	Voltage	Power W/m	PCB size (mm)	Color	Lumen lm/w	Lumen CRI>90
LCE COB-CV12/24608-CCT-P10-E	608	CV12/24V	6W	10mm	2700K	80	240LM
					6000K	100	300LM
					2700K+6000K	90	540LM

Note: All above parameters were given based on naked strip without additional heat sink or housing.
Customized size or customized color temperature, pls contact us further.

Product Parameters

Spectroscopic standard


Ensure customers to get the same bin for different orders by using CIE(X,Y) coordinate spectrometer

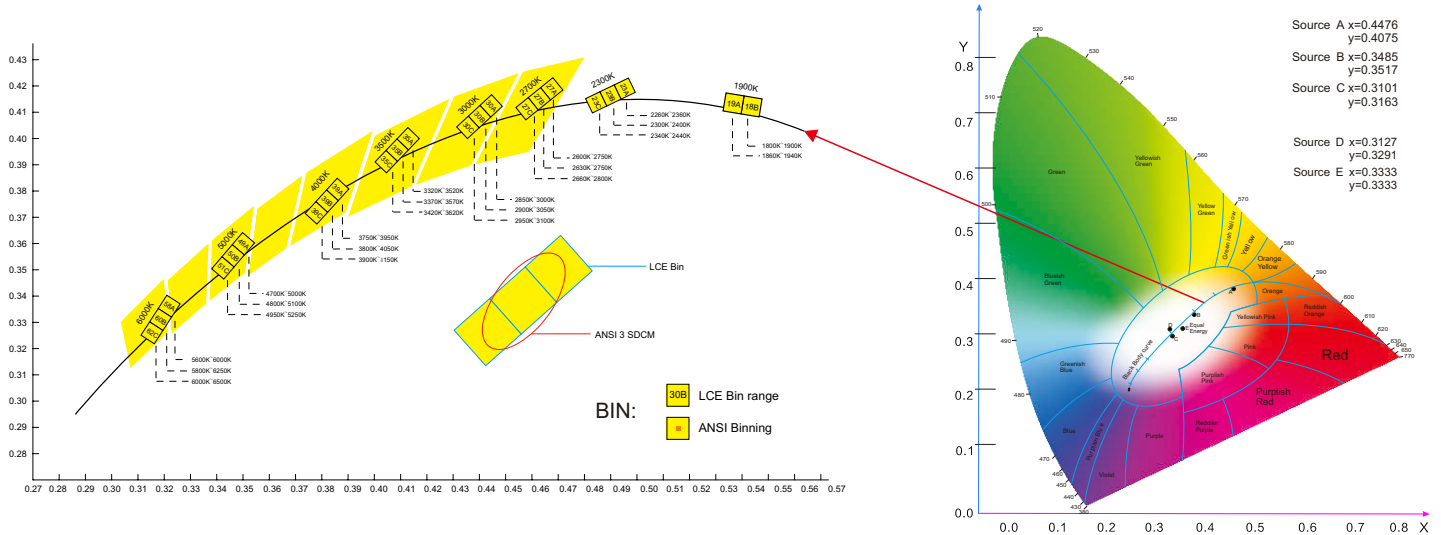


Product Specification

Item:	COB led strip	Driver:	External led driver
Qty Chips:	608chips/m	Mains voltage (V):	DC12/24V
Color:	CCT(2700-6500K)	Control gear type:	CONSTANT VOLTAGE DRIVER
PCB width:	10mm	Ref:	LCE
Light controller type:	0-10V/1-10V/DMX/DALI/Triac	Emergency availability:	/
Light Decay:	2% @ 6000Hours	Chip:	Epistar or other brand chips
Operating Temperature:	-25~45 degree	Light emission:	180°
Lifetime:	(Lm80) 50000 HRS @45degree	Deviation (SDCM):	3step MacAdam ellipse
Mounting:	3M adhesive tape	BIN:	ONE BIN Only
Max running length:	10meter (two side feed)	Warranty:	5 years
Luminaire in:	CLASS II/III		

Light Distribution Curve [Unit:cd]

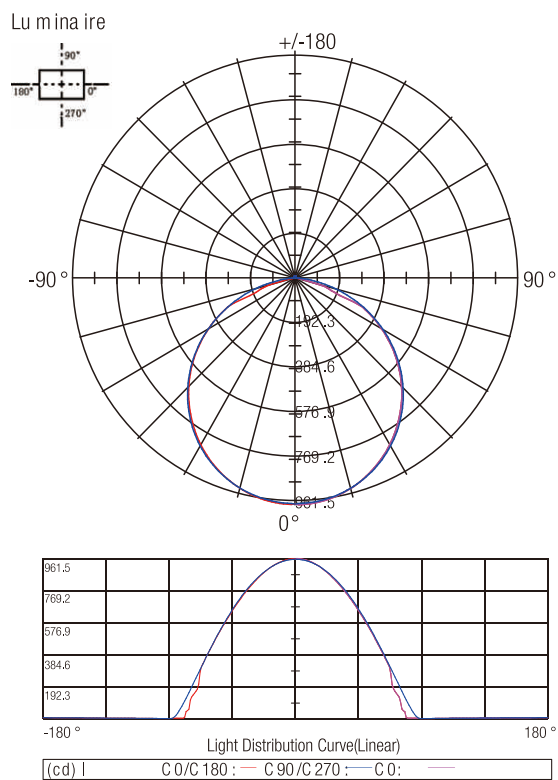


Lux-Distance Curve

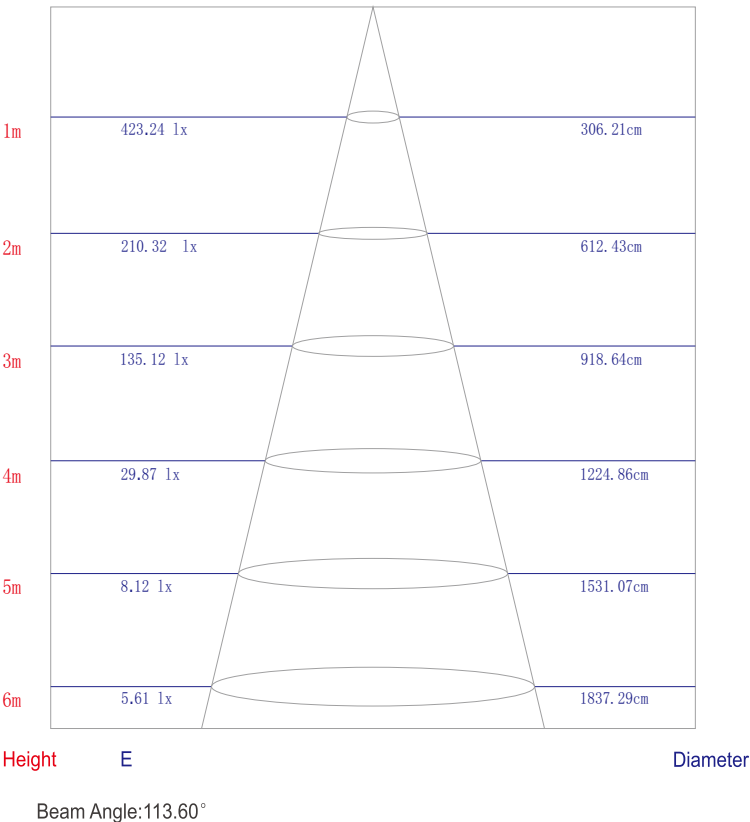

Colour Rendering Index

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
91	94	97	90	90	92	94	89	68	89	89	63	93	98	89


LED Strip Solution

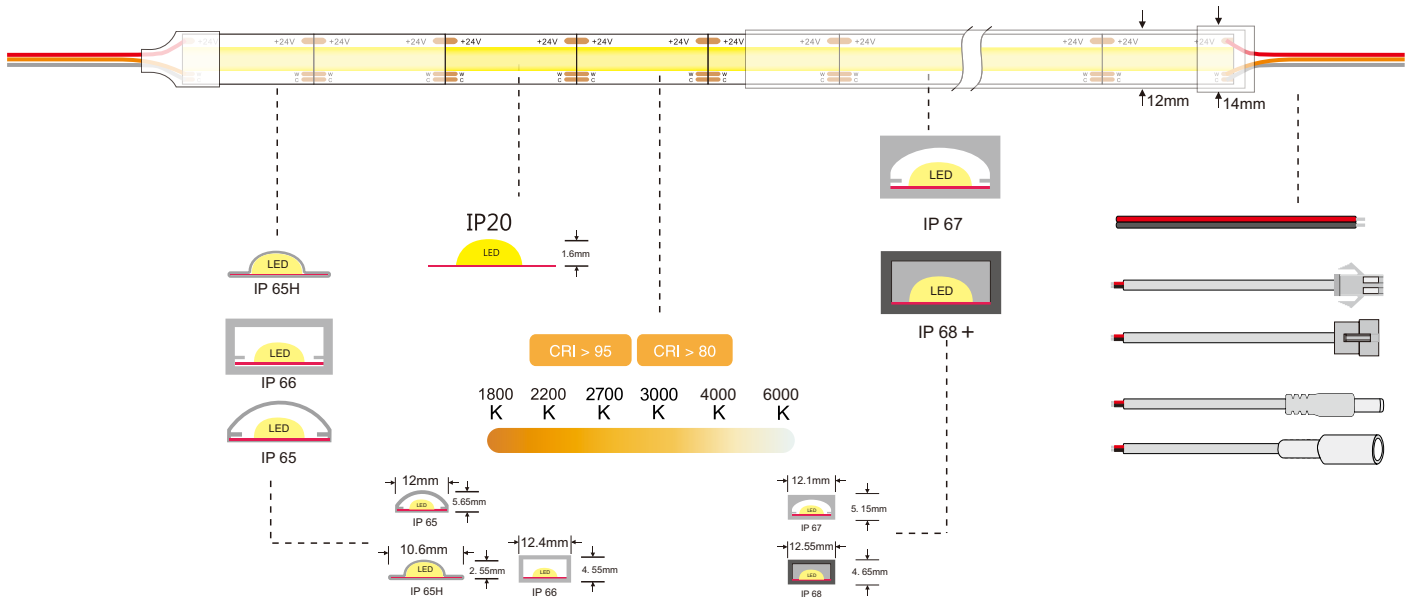


One end feed



Two ends feed

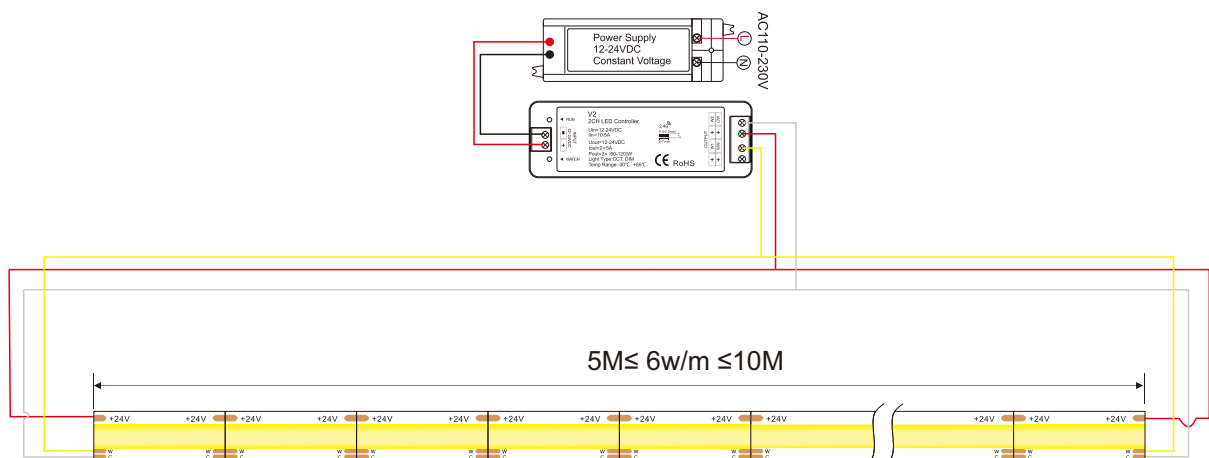

IP Level Diagram

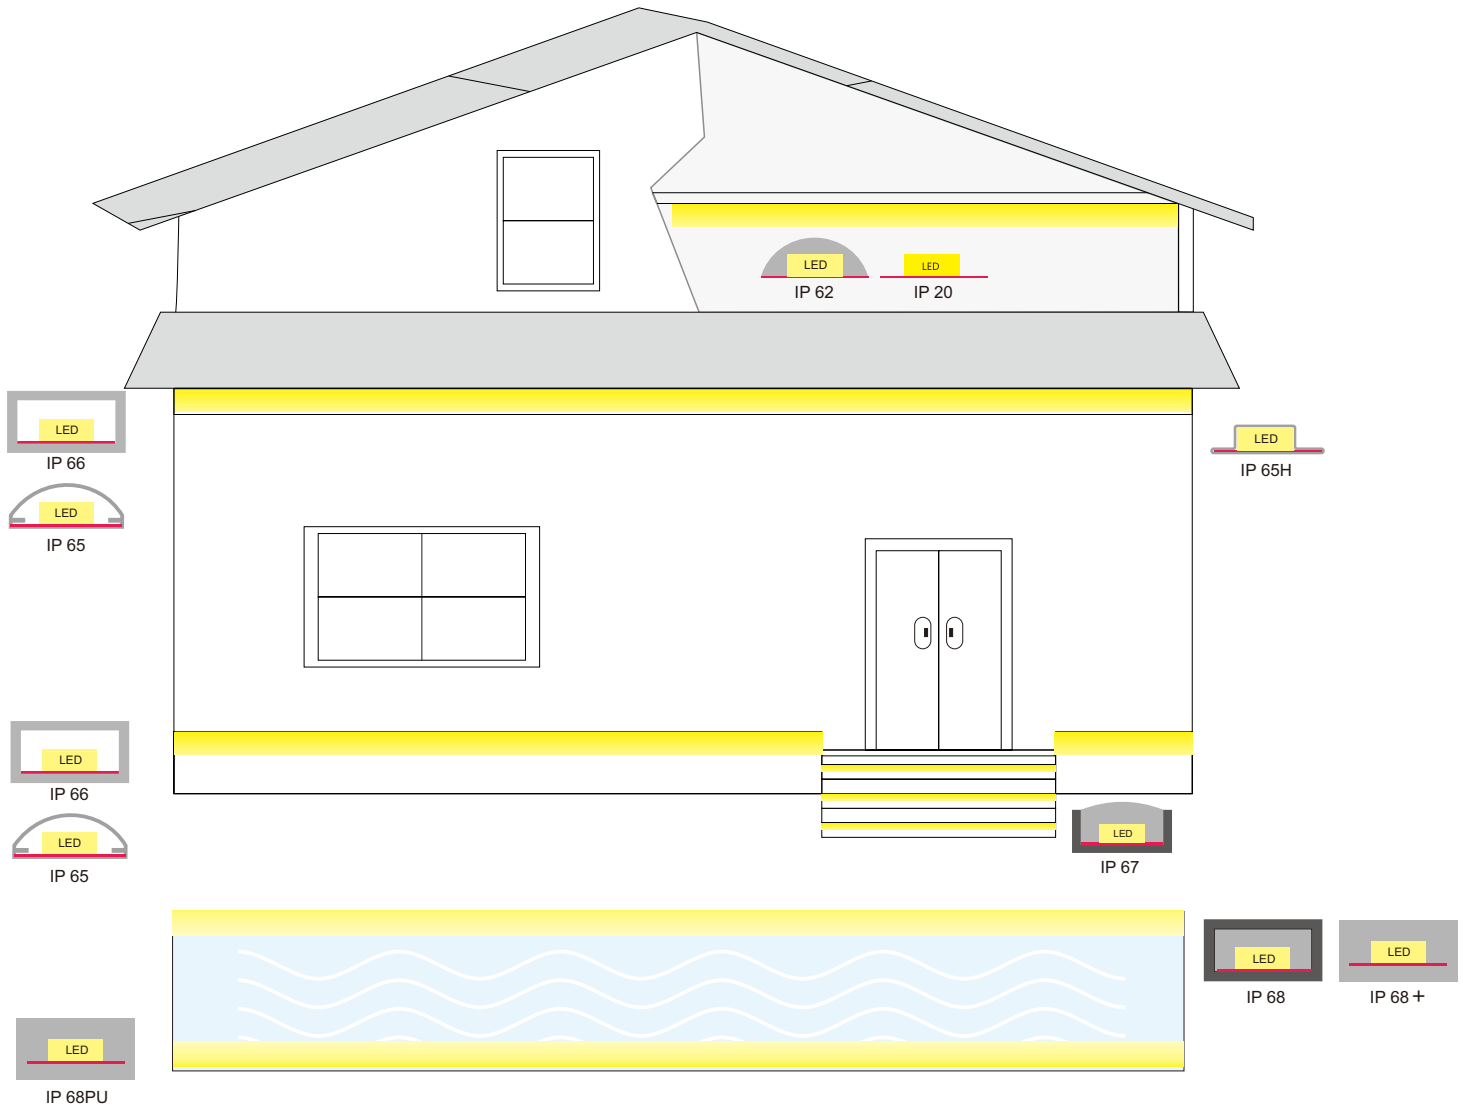

IP 20
FPC — LED — Non-Waterproof

IP 62
PU/SILICON GLUE — LED — FPC — Anti Splash Water
Tiny Size Changed
Glue Dripping Process

IP 65
EXTRUSIVE SILICON TUBE — LED — FPC — Anti Splash Water
Tiny Size Changed
No Color Shift
Silicon Extrusion Process In Molding

IP 65H
HEAT SHTINK TUBE — LED — FPC — Anti Splash Water
Tiny Size Changed
No Color Shift
HEAT SHTINK TUBE

IP 66
SILICON TUBE — LED — FPC — Anti Spray Water
Tiny Color Shift
Silicon Tube Process


IP67
PU/SILICON GLUE — LED — SILICON TUBE — FPC — Immerse In Water For Short Time
U-Shape Tube+Glue Pouring Process

IP68
PU/SILICON GLUE — LED — SILICON TUBE — FPC — Immerse In Water For Long Time
U-Shape Tube+Glue Injected Process


IP68+/PU
EXTRUSIVE SILICON TUBE OR PU — LED — FPC — Immerse In Water For Long Time
Silicon Extrusion Process In Molding

Installation Diagram:


1. connection with CCT controller

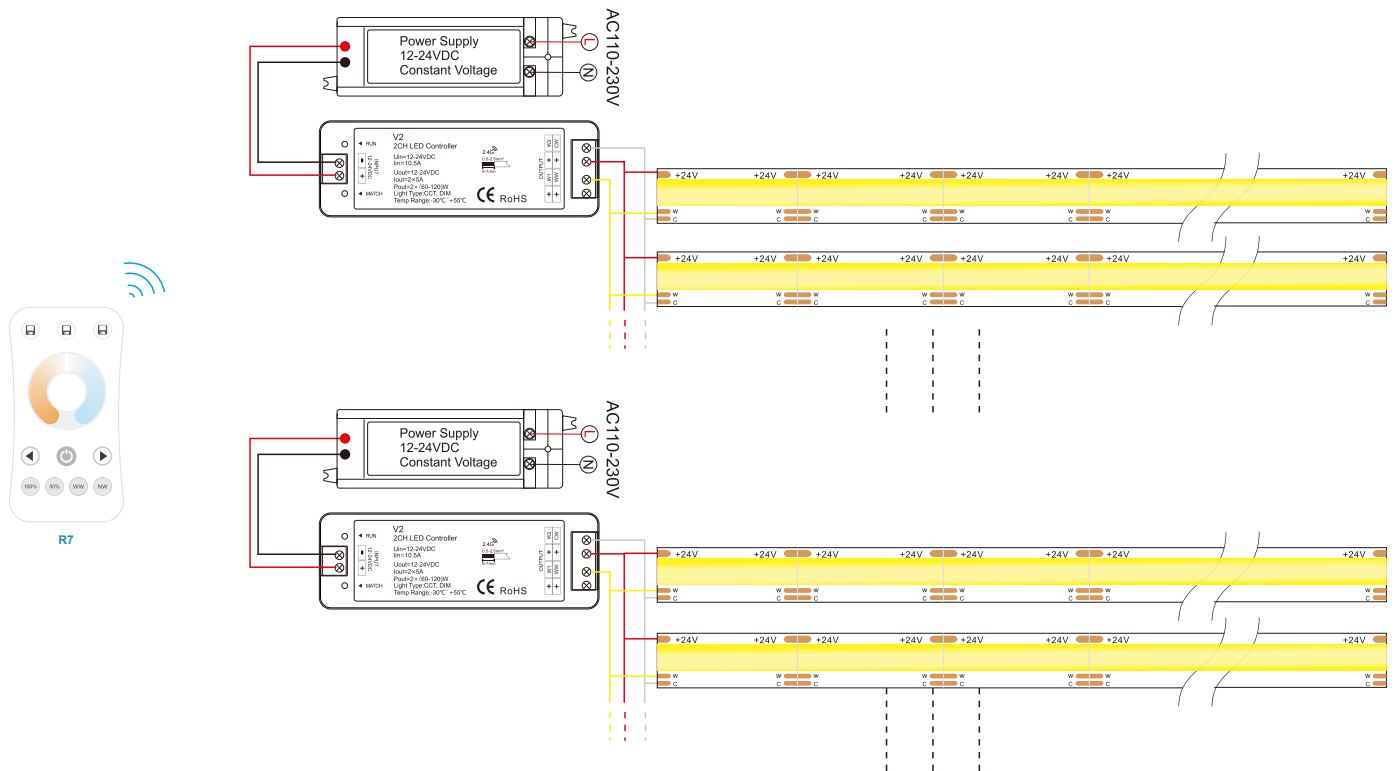


Installation




1. Cut in specific location




2. Put the PCB in the space between clip and connector, make the clips exactly aim at welding point




3. Close the cover of connector




1. Cut in specific location




2. Infuse the gel in the end cap



3. connect the end cap and wait for air drying




1. Install with clips




2. Fix with screws


1. STRIP TO STRIP INSTALLATIONS




1. Cut the light strip from the cut point



2. Tear off the 3M glue behind the light strip




3. Put the COB light strip inside the crystal connector and press the iron piece down.




4. Test the light strip after pressing down the iron sheet, the installation is complete


2. STRIP TO WIRE INSTALLATIONS



1. Prepare the dedicated cable for the crystal connector



2. Put the light strip and cable into the crystal connector and press down the iron piece



3. Installation is complete, test the light strip

Accessories:




Crystal Connector



Cautions




When install the led strip,,please note the installation technique.The led strip can be bent,but not distorted,as shown below.

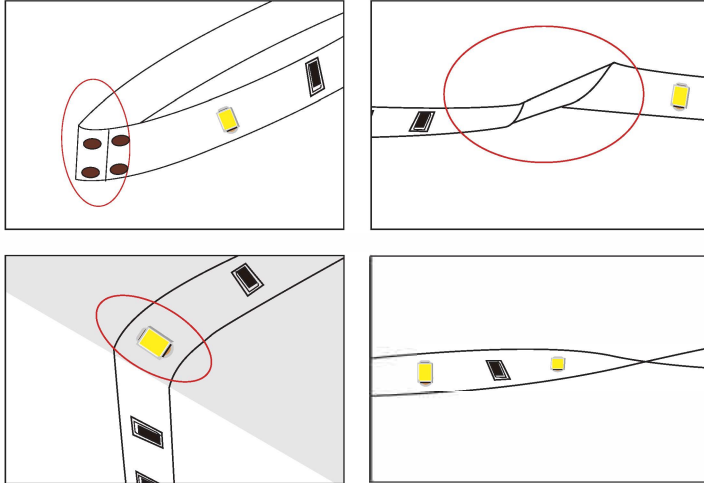

Distortion(Wrong)


LED strips are low votage products,you must use the power supply(transformer).Please don,t connect the led strip directly to the AC 110v or AC 220v,otherwise it will burn out the LED strips.

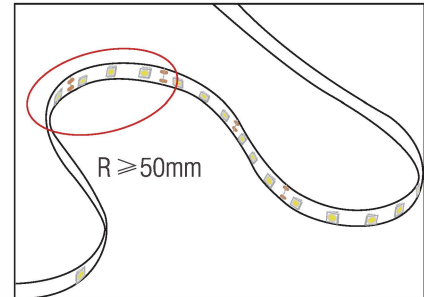

Bend(Right)

Clean up the installation surface,it will ensure the reliability of the adhesive,The electrical connection process must be operated by a professional person.

Packing :

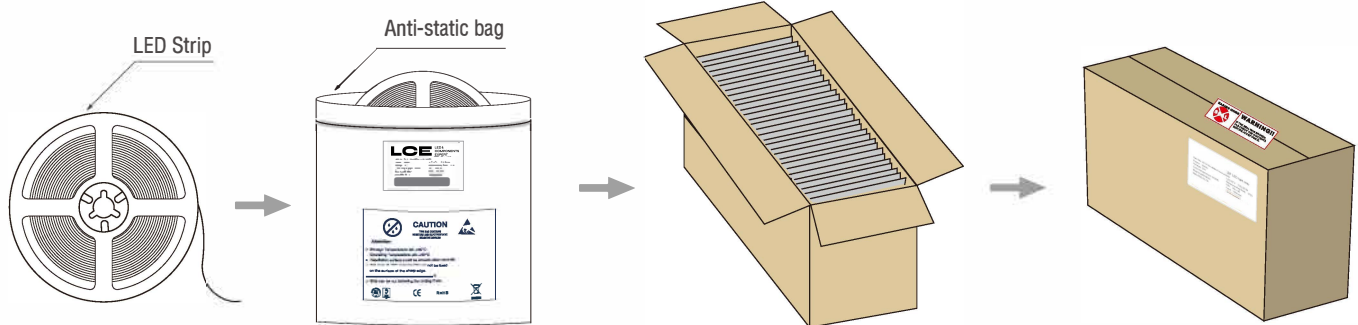

Notice:

- 1、 Please apply different IP rate products according to different environment conditions;
- 2、 Adopt suitable power supply to match the LED strips. Power is 20% bigger than max power of LED strips to ensure long time performance of power supply;
- 3、 Do not install it when power is on. Before powering on, please make sure the wiring is correct;
- 4、 Avoid privately changing or damaging the circuit or other component on the strip;
- 5、 Avoid scrape or bending during installation, it might be damaged with non repairable status;
- 6、 Strip linked in over long length would lead to problem of overload or uneven brightness;
- 7、 To protect your eyes, do not stare at the light for a long time while it's illuminated;
- 8、 Only professional personnel can install, dismantle and repair;
- 9、 Choose different connectors and controllers according to your different strip.