
LightMAX

R0498

2x6 power LED module

8 YEARS WARRANTY


CC CONSTANT CURRENT

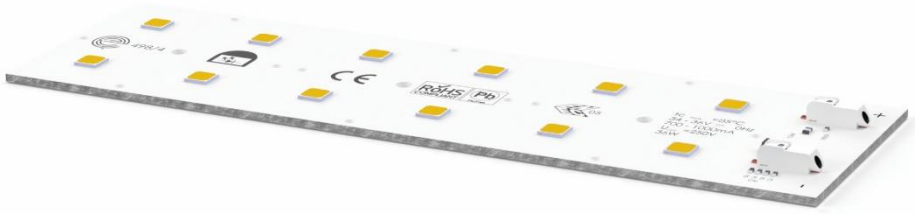

FEATURES

- PCB dimension: 170x50mm
- Up to 9247 lm
- Up to 226 lm/W
- CRI 70
- Max Electrical Insulation 250Vdc
- Max 7 LED boards in series
- Connection type: WAGO 2060 1P
- Lifetime > 100.000h @ 700mA<if<1050mA L90B10
- NTC available on request (10k standard)
- ENEC certified

APPLICATIONS

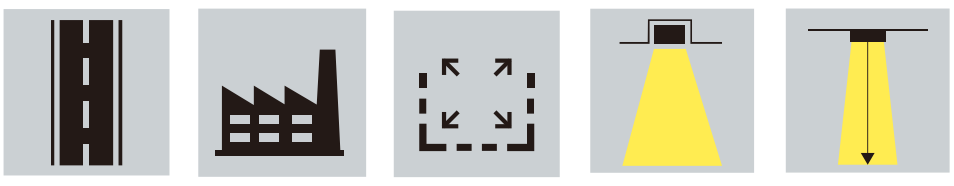

Universal Science S.r.l. - Sole shareholder company
Via Adige 30 – 20006 Pregnana Milanese (MI) - Italy
sales@redmade.it | www.redmade.it

Performance type HEF

Code	CCT	CRI	Current [mA]	Voltage [V]	Power [W]	Total Lumen [lm]	Lm/W	Energy Efficiency
R0498012770	2700K	70	350	31.6	11.1	2312	208	B
			700	32.8	23	4550	198	C
			1050	33.8	35.5	6602	186	C
			1400	34.8	48.7	8516	175	C
R0498013070	3000K		350	31.6	11.1	2383	215	B
			700	32.8	23	4689	204	B
			1050	33.8	35.5	6804	192	C
			1400	34.8	48.7	8776	180	C
R0498014070	4000K		350	31.6	11.1	2510	226	B
			700	32.8	23	4941	215	B
			1050	33.8	35.5	7169	202	B
			1400	34.8	48.7	9247	190	C

Flux tolerance +/- 10% @60°C
Vf Tolerance +/- 5%

Ask for more information about available LED and other options.

Performance type STD

Code	CCT	CRI	Current [mA]	Voltage [V]	Power [W]	Total Lumen [lm]	Lm/W	Energy Efficiency
R0498012770	2700K	70	350	32.5	11.4	2234	196	C
			700	33.8	23.7	4398	186	C
			1050	34.9	36.6	6381	174	D
			1400	36.1	50.5	8230	163	D
R0498013070	3000K		350	32.5	11.4	2297	201	C
			700	33.8	23.7	4521	191	C
			1050	34.9	36.6	6560	179	C
			1400	36.1	50.5	8462	168	D
R0498014070	4000K		350	32.5	11.4	2400	210	B
			700	33.8	23.7	4723	199	C
			1050	34.9	36.6	6853	187	C
			1400	36.1	50.5	8840	175	D

Flux tolerance +/- 10% @60°C
Vf Tolerance +/- 5%

Ask for more information about available LED and other options.

Universal Science S.r.l. - Sole shareholder company
Via Adige 30 – 20006 Pregnana Milanese (MI) - Italy
sales@redmade.it | www.redmade.it

LightMAX

R0498

2x6 power LED module

8 YEARS WARRANTY

CC CONSTANT CURRENT

LED and board features	
LED number	12
LED type	5050
Circuit	S6P2
Material	Aluminium
Solder	White (Matt Black on request)
Connections	
Cable	0.20-0.75mm^2, AWG 24-18
Connector	WAGO 2060 1P (WAGO 2059 2P for NTC)
Power	
Abs. Max Input current CC	1600mA
Mechanical Data	
H x L	170x50mm
Thickness	6mm
Conditions	
Max. temp. (Tp)	+110°C
Max. temp. (Tc)	+100°C
Operating temp. Range	-35°C +60°C

Universal Science S.r.l. - Sole shareholder company
Via Adige 30 – 20006 Pregnana Milanese (MI) - Italy
sales@redmade.it | www.redmade.it

LightMAX


R0498

2x6 power LED module


8 YEARS WARRANTY

CC CONSTANT CURRENT

MECHANICAL DRAWING

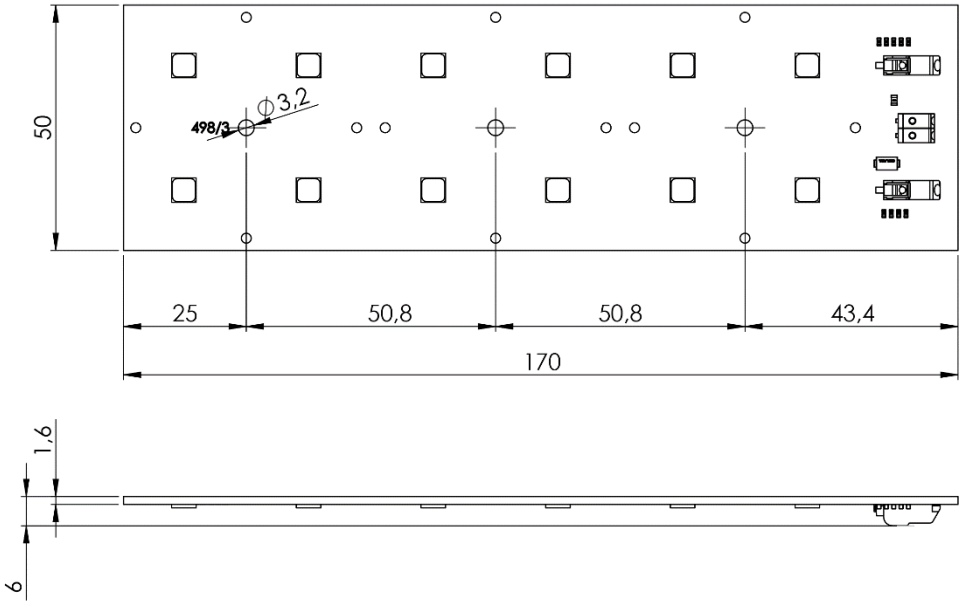

ELECTRICAL CIRCUIT

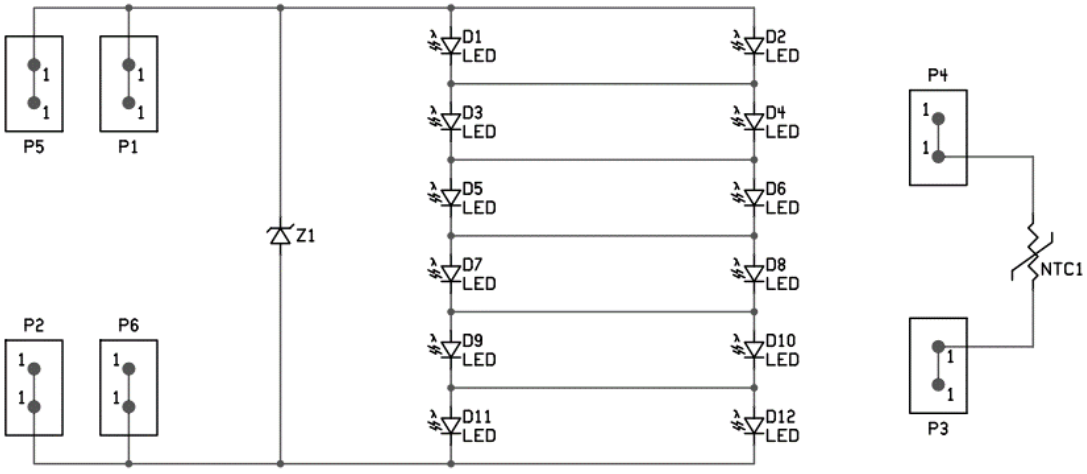

Universal Science S.r.l. - Sole shareholder company
Via Adige 30 – 20006 Pregnana Milanese (MI) - Italy
sales@redmade.it | www.redmade.it

ASSEMBLY AND SAFETY INFORMATION

The LED modules are designed to be incorporated in a final appliance. Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnected from the mains).
Additionally, the following advice must be observed; non-observance can result in electrical, mechanical and/or fire hazards.

- ESD (electrostatic discharge) protection measures must be observed when handling and installing the LED modules.
- Transient protection measures (as per IEC 61000-4-5), especially for outdoor applications, must be observed (e.g. SPD).
- Adequate anti-static electricity measures, including the use of conductive shoes, ionizers, work bench grounding, wrist straps, flooring and stools should be used.
- LED assembly modules must not be subjected to any undue mechanical stress, e.g.:
  - Do not treat as bulk cargo.
  - Avoid sharing and compressive forces during handling and installation.
  - Do not damage circuit paths.
  - Avoid any pressure on the light emitting surface.
- Safe operation is only possible using proper external sources (e.g: constant current sources - Imax. see table "Electrical Characteristics").
- Operate only with power supply units that feature the following protection:
  - Short-circuit protection
  - Overload protection
  - Overheating protection
- The module can be fixed with M3 screws. They are recommended to be fixed only with flat or cylinder head screws (M3) (no countersunk screws – if not differently specified). Max. torque: 1.2 Nm (M3)
- Please ensure the correct polarity of the leads prior to applying power. Reversed polarity can destroy the modules.
- For interconnection, the LED modules are usually equipped with push-in terminals. Custom connectors are available upon request during the project bidding stage.
- General Safety regulations acc. to IEC/EN 60598-1 (or specific standards related to different lighting applications) must be observed.
- The following points must be observed when connecting LED modules in parallel:
  - All LED strings that are wired in parallel must contain the same number of LEDs (symmetrical loading).
  - Owing to differing forward voltage, there can be a difference of up to 10% in brightness between modules connected in parallel.
  - For this installation setup, please notify us when placing your order.
- To ensure problem-free operation, the specified maximum temperature at the tp point (see "Operating Life") must be observed (and measured in accordance with IEC 62717 – Annex H).
- In the event of outdoor applications or applications in damp locations, care must be taken to protect LED modules against humidity, splashes and jets of water. Any corrosion damage resulting from humidity or contact with condensation will not be recognized as a defect or manufacturing fault. LED modules are not specifically protected against foreign bodies or dust. Depending on the type of application, further protection must be provided to prevent ingress.
- Due to the manufacturing process, the PCBs of the LED modules can have sharp edges and corners. Care must therefore be taken during handling and installation to avoid injury.
- Constant current drivers require for an optimal usage that the modules are connected in series. For this type of usage, there must be ensured that the quantity of LED modules is limited by the sum of forward voltage and the capacity of used constant current driver. Safety regulations acc. to IEC/EN 60598 must be observed if the sum of forward voltage exceeds the permitted touchable value.
- There is a list of chemical substances (as sulfur) that has been proved to make the LED module damaged. Also, in chemically enriched (aggressive) environments the LED module functionality can be compromised, or they can even cause total module failure. Keep attention to this aspect before installing the LED module.
- The photobiological safety of the LED modules must be classified into risk groups in accordance with IEC/EN 62471 and IEC/EN 62471-7.

APPLIED STANDARDS

IEC / EN 62031
LED modules for general lighting – Safety specifications

IEC 62717
LED modules for general lighting - Performance requirements

IEC/EN 60598-1
Luminaires – Part 1: General requirements and tests

IEC/EN 62471
Photobiological safety of lamps and lamp systems

IEC 61000-4-5
Electromagnetic compatibility (EMC) – Part 4-5: Testing and measurement techniques – Surge immunity test

GENERAL NOTES

- Due to continuous improvements and innovations, specifications are subjected to change without notice.
- The images shown are for illustration purposes only and may not be an exact representation of the product.

Universal Science S.r.l. - Sole shareholder company
Via Adige 30 – 20006 Pregnana Milanese (MI) - Italy
sales@redmade.it | www.redmade.it