




LED NEON FLEX SPECIFICATION

IP67 NEON 1010 24V TOP VIEW (SINGLE-SIDE LIGHTING)

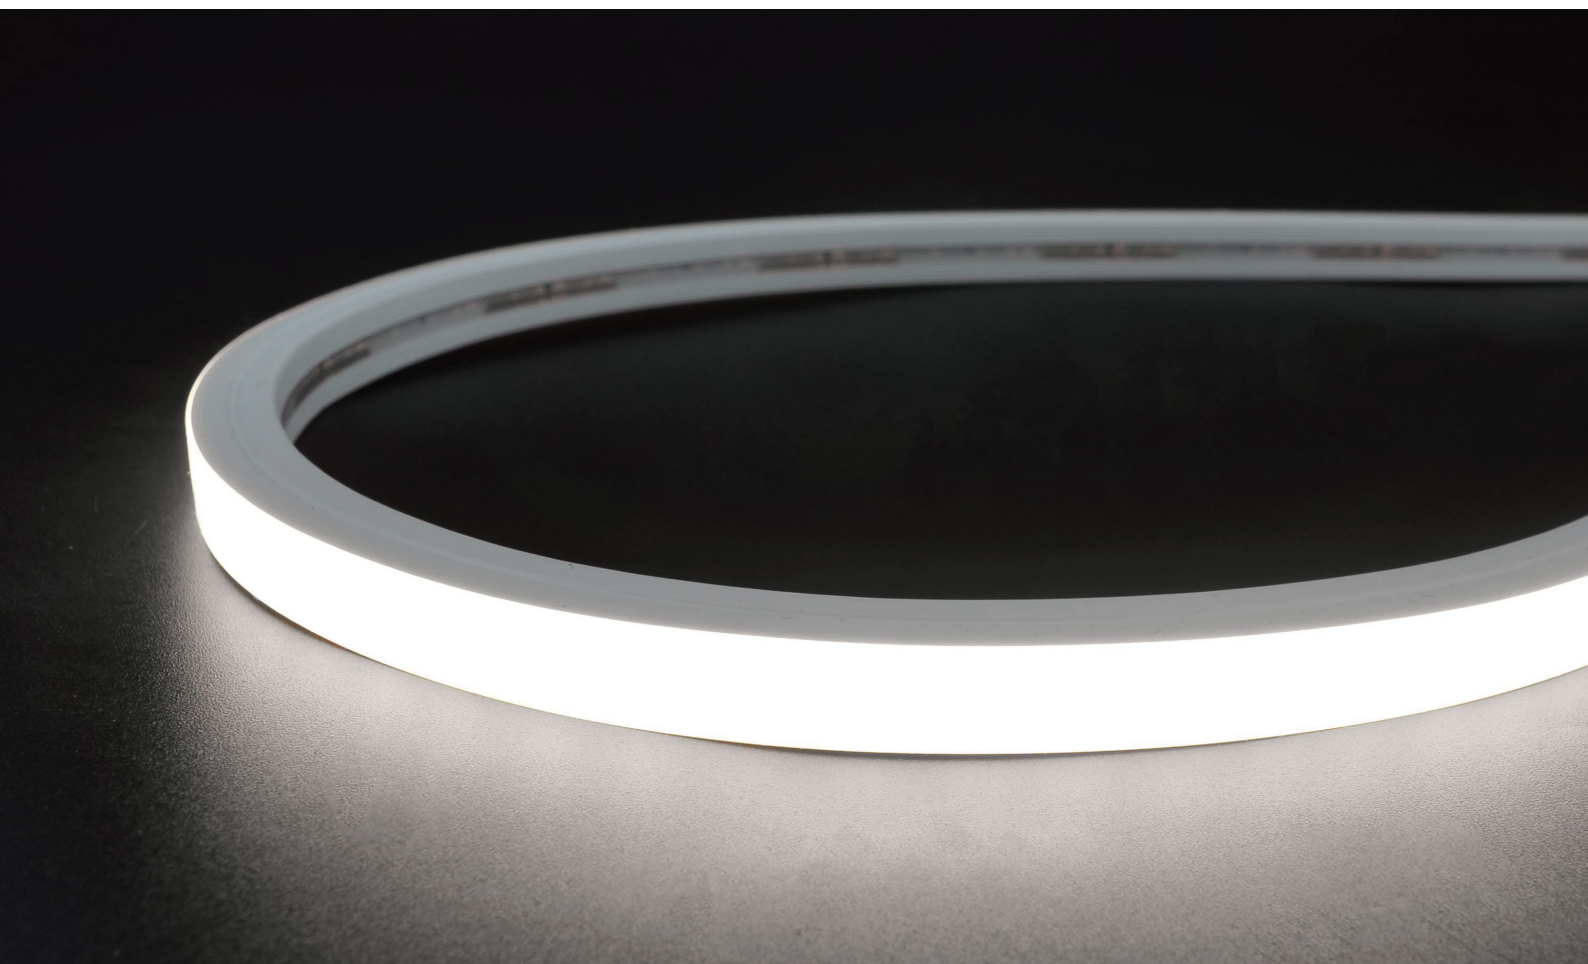

IP67 NEON 1010 24V TOP VIEW (SINGLE-SIDE)

Using Dow Chemical brand silicone rubber


Eco-friendly silicone with integrated extrusion process

Unique optical design for even, shadow-free illumination




IP67 with resistance to salts, acids, alkalis, and UV

Matt finished surface, dust-resistant

2400K 2700K 3000K 3500K 4000K 5200K 6500K
2700K
~6000K

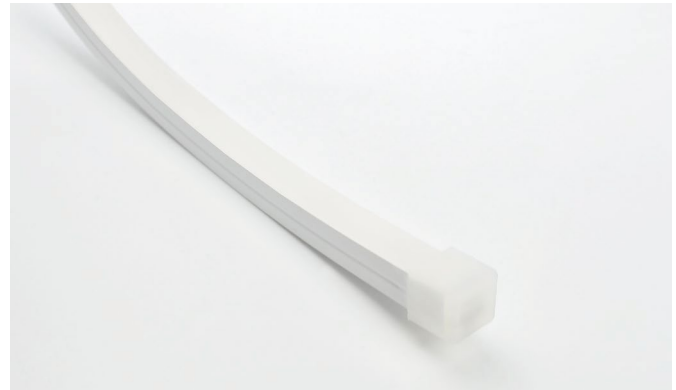

Dimensions & Waterproof

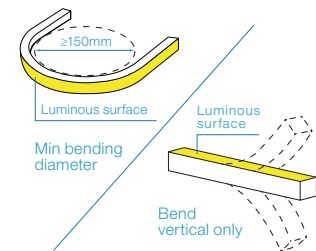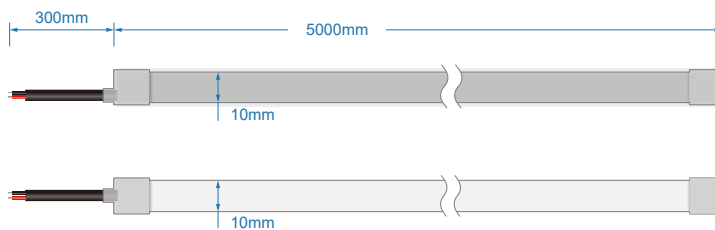

Electrical Parameter

Voltage	DC24V
LED PIN Temperature	Max. 65°C
Storage Temperature	-25°C~ 60°C
Ambient Temperature	Min.-25°C Max(Table below)
CRI	≥90

Specification

Power	Min:5W/M;Max:10W/M
Efficacy@4000K	84lm/w
Max Ambient Temperature	45°C

Due to the tolerance of the production and electrical components, output value and electrical power can vary up to 10%

Length Standard

Length Range (M)	Final Length Silicone end cap	Tolerance
0M<Neon Strip(L)≤5M	L+8	±7
5M<Neon Strip(L)≤10M	L+8	±10
10M<Neon Strip(L)≤15M	L+8	±13

Length Range (M)	Final Length Silicone end cap	Tolerance
15M<Neon Strip(L)≤20M	L+8	±16
20M<Neon Strip(L)≤25M	L+8	±19
25M<Neon Strip(L)≤30M	L+8	±22

Single color parameters

CCT(K)	CRI	Voltage	Low power(5w/m)		High power(10w/m)		Unit Length (mm)	Max. Run Length(M)		CC/CV
			LM/M	LM/W	LM/M	LM/W		5w/m	10w/m	
2400K±150	≥90	DC24V	355	71	710	71	50	19 (CC)	13 (CC)	CC/CV
2700K±150	≥90	DC24V	390	78	780	78	50	19 (CC)	13 (CC)	CC/CV
3000K±150	≥90	DC24V	370	74	740	74	50	19 (CC)	13 (CC)	CC/CV
3500K±200	≥90	DC24V	365	73	730	73	50	19 (CC)	13 (CC)	CC/CV
4000K ^{+400 -200}	≥90	DC24V	420	84	840	84	50	19 (CC)	13 (CC)	CC/CV
5200K±300	≥90	DC24V	435	87	870	87	50	19 (CC)	13 (CC)	CC/CV
6500K±500	≥90	DC24V	430	86	860	86	50	19 (CC)	13 (CC)	CC/CV
Red	--	DC24V	150	30	300	30	50	19 (CC)	17 (CC)	CC/CV
Green	--	DC24V	325	65	650	65	50	25 (CC)	13 (CC)	CC/CV
Blue	--	DC24V	84	16.8	168	16.8	50	19 (CC)	13 (CC)	CC/CV
Yellow	--	DC24V	170	34	340	34	50	19 (CC)	17 (CC)	CC/CV
Pink	--	DC24V	280	56	560	56	50	25 (CC)	13 (CC)	CC/CV

CCT Tunable (Lm/m)


CCT(K)	CRI	Voltage	High power(5w/m)		High power(10w/m)		Unit Length (mm)	Max. Run Length (M)	CC/CV
LM/M	LM/W	LM/M	LM/W						
WW	≥90	DC24V	142.5	77	285	77	50	5	CV
W	≥90	DC24V	205	82	410	82	50	5	CV
W+WW	≥90	DC24V	400	80	800	80	50	5	CV

RGB (Lm/m)


CCT(K)	CRI	Voltage	High power(5w/m)		High power(10w/m)		Unit Length (mm)	Max. Run Length (M)	CC/CV
LM/M	LM/W	LM/M	LM/W						
R	--	DC24V	34.3	20.8	68.6	20.8	50	5	CV
G	--	DC24V	117.0	70.9	234.0	70.9	50	5	CV
B	--	DC24V	22.45	13.6	44.9	13.6	50	5	CV
RGB	--	DC24V	181.0	36.2	362.0	36.2	50	5	CV

- The maximum series length refers to the maximum single end power supply length of the constant current strip under the condition of standard 30cm wire .
- The given color temperature is the temperature of finished product.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- All products can be dimmed; the dimmer's voltage should conform to the rated voltage of the led light.
- The output frequency of the dimmer of the constant-current led light should be less than 2K Hz, and the output PWM can control the led light.


Silicone end cap

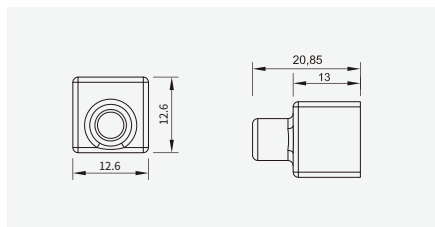

Front Cable Entry

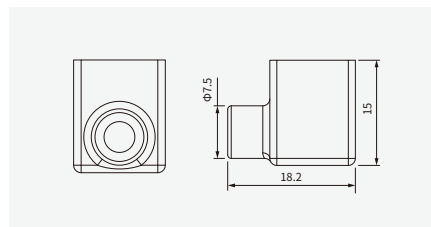

Side Cable Entry

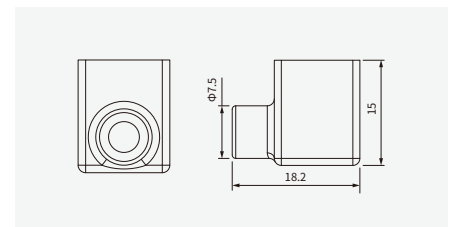

Bottom Cable Entry


Cable

Cable Type	Schematic Diagram	Specification	Core	Electrical Properties
PVC Cable		OD: 4.0MM / Inner core: 20AWG	● ●	Red V+ / Black V-
		OD: 4.0MM / Inner core: 22AWG	● ○ ●	Brown V+ / White W / Yellow WW
		OD: 4.0MM / Inner core: 24AWG	● ● ● ●	Black V+ / Blue B / Green G / Red R
Waterproof		OD: 4.0MM / Inner core: 20AWG M8Male / Female connector	● ●	Red V+ / Black V-
Connector with		OD: 4.0MM / Inner core: 22AWG M8Male / Female connector	● ○ ●	Brown V+ / White W / Yellow WW
PVC Cable		OD: 4.0MM / Inner core: 24AWG M8Male / Female connector	● ● ● ●	Black V+ / Blue B / Green G / Red R

Cutting Mark



Cutting Mark

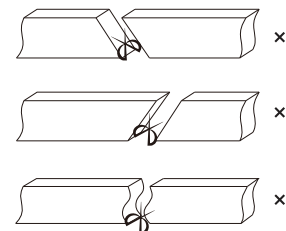

Remark:

The bottom of the led strip has transparent window, the black marker is the cutting position

Use professional scissors to cut vertically at the cutting mark

Please don't be feel free to cut and cut into an oblique angle or cambered section.


Mounting Way

Stainless Steel Mounting clips




Dimension: 8X7.6X11.6mm
Accessories: Screw M3x15mm

Aluminium Profile

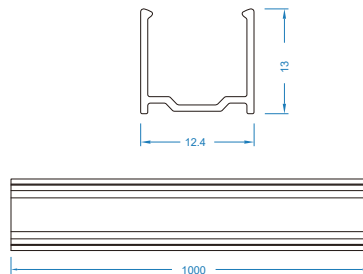


Dimension: 1000(±5)x12.4x13mm
Accessories: Screw M3x15mm

transparent plastic groove





Dimension: 1000(±5)x12x14.3mm
Accessories: Screw M3x15mm

Wiring diagram

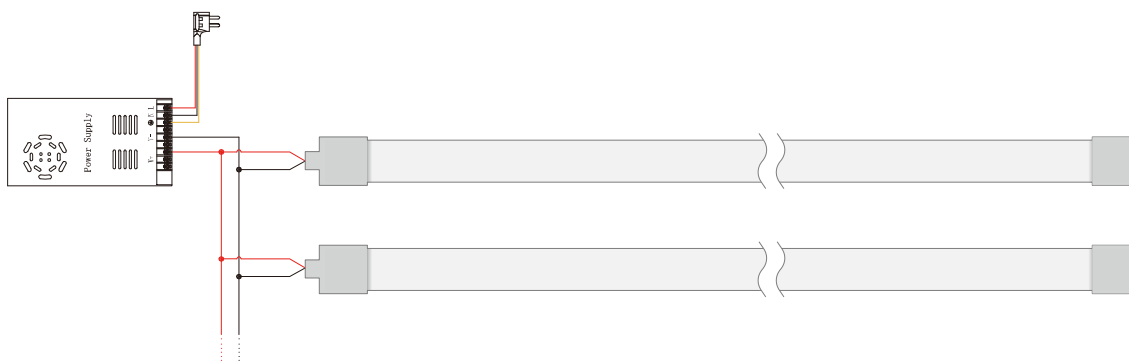


The diagram illustrates a 4-channel LED lighting system. A central power supply is connected to four LED amplifiers. Each amplifier is connected to a power supply and a set of LED strips. The wiring is color-coded: red for power, blue for ground, green for data, and yellow for control. The diagram shows the connection of the power supply, the LED amplifiers, and the LED strips.


Installation Precautions

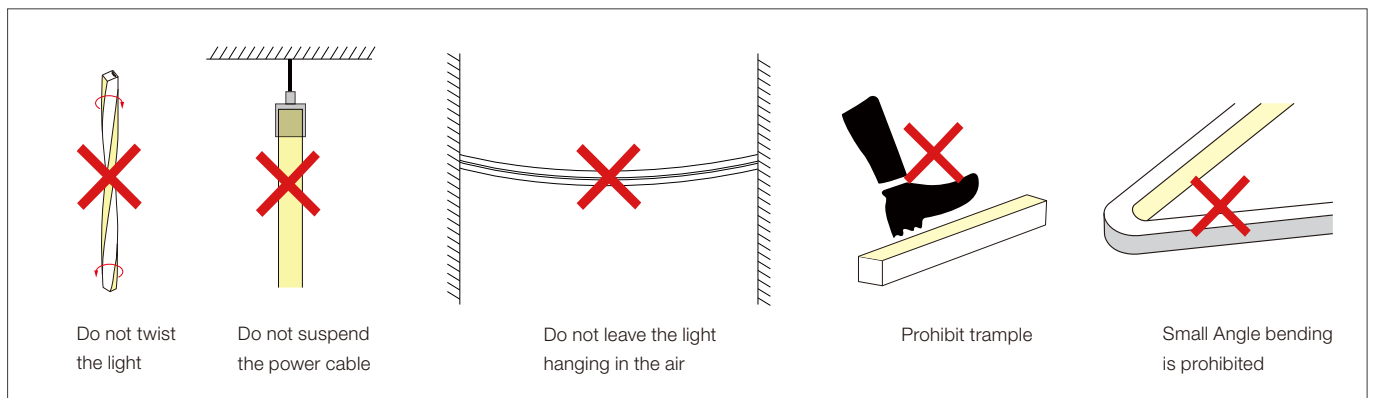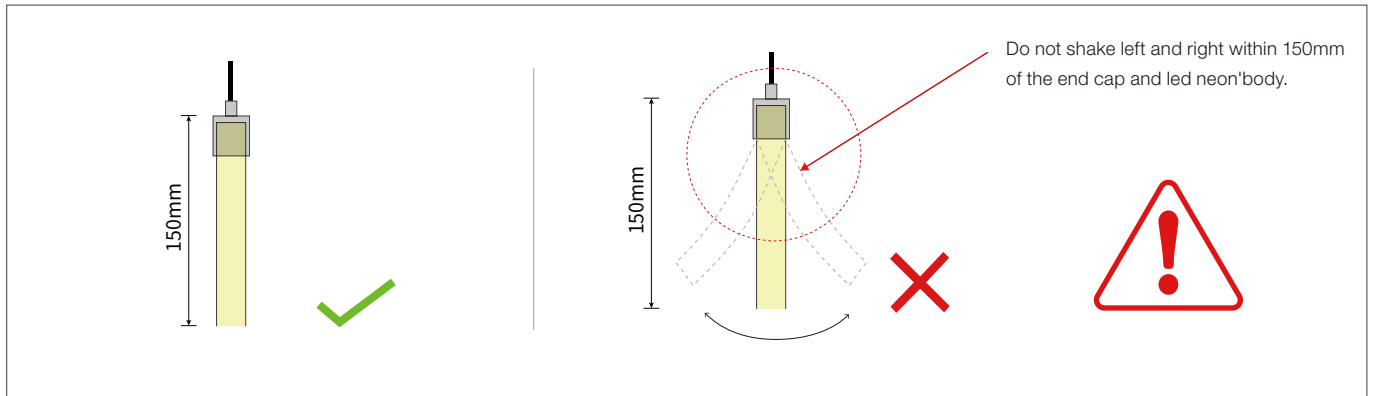


Put it in the profile

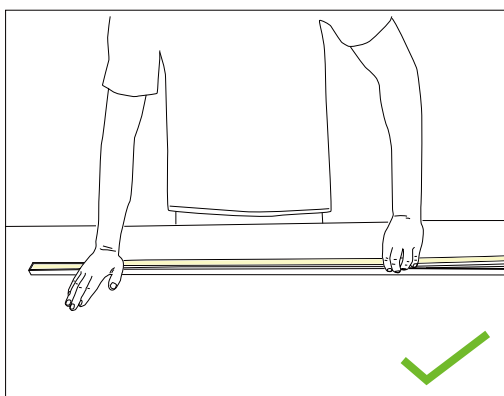

- Please press the led strip with your palm to slowly insert the led strip into the groove, and gently straighten the led strip above the groove with your right hand.
- Try to keep the led strip in a flat state during the installation process.

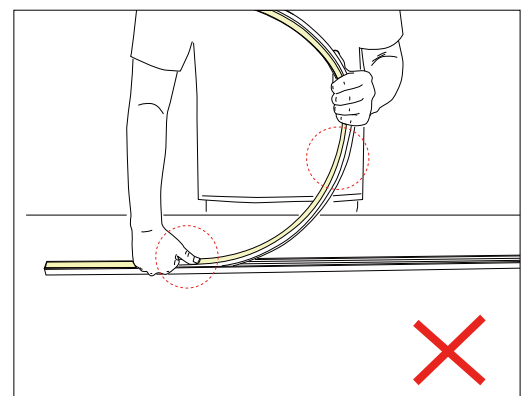


- Do not press the led strip with a single finger, it is easy to damage the internal parts of the led strip.
- The bent arc of the led strip should not be too large during installation.

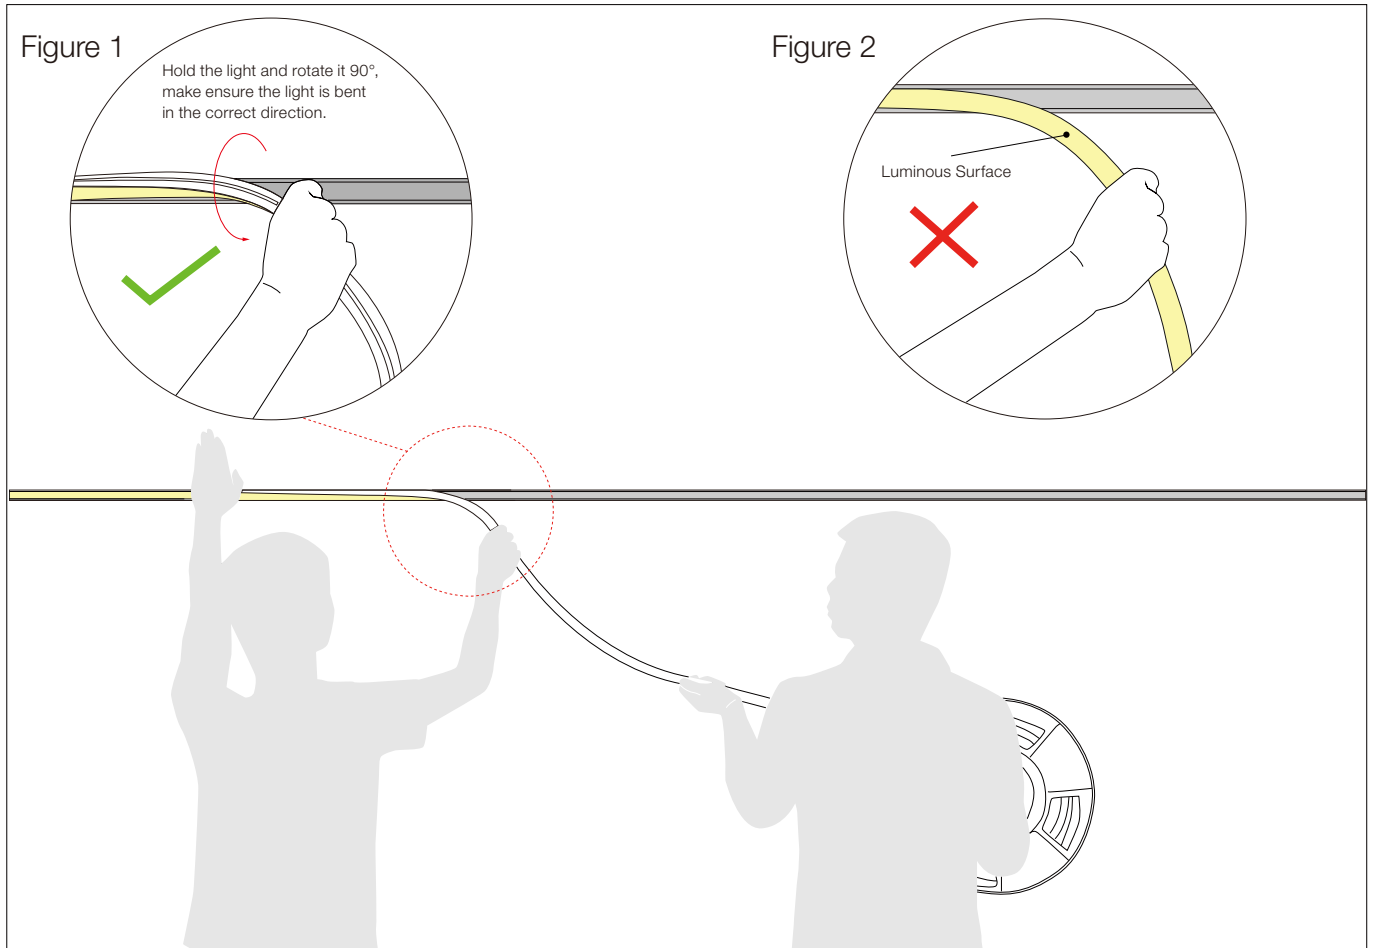Installation Precautions--Side Mounted (If the length of the light is more than 2 meters, two persons must work together to install it.)**1.Installer:**

- Press the light with the palm of the left hand to slowly load it into the slot. Straighten the light with right hand, hold it and rotate it 90° to droop it in the direction of your hand. See Figure 1.
- Do not bend the luminous surface to the side. See Figure 2.

2.Assistant:

- Cooperate with the installer to lift the reel of the light, and then slowly deliver the light to installer. Do not pull or twist the light during the installation.

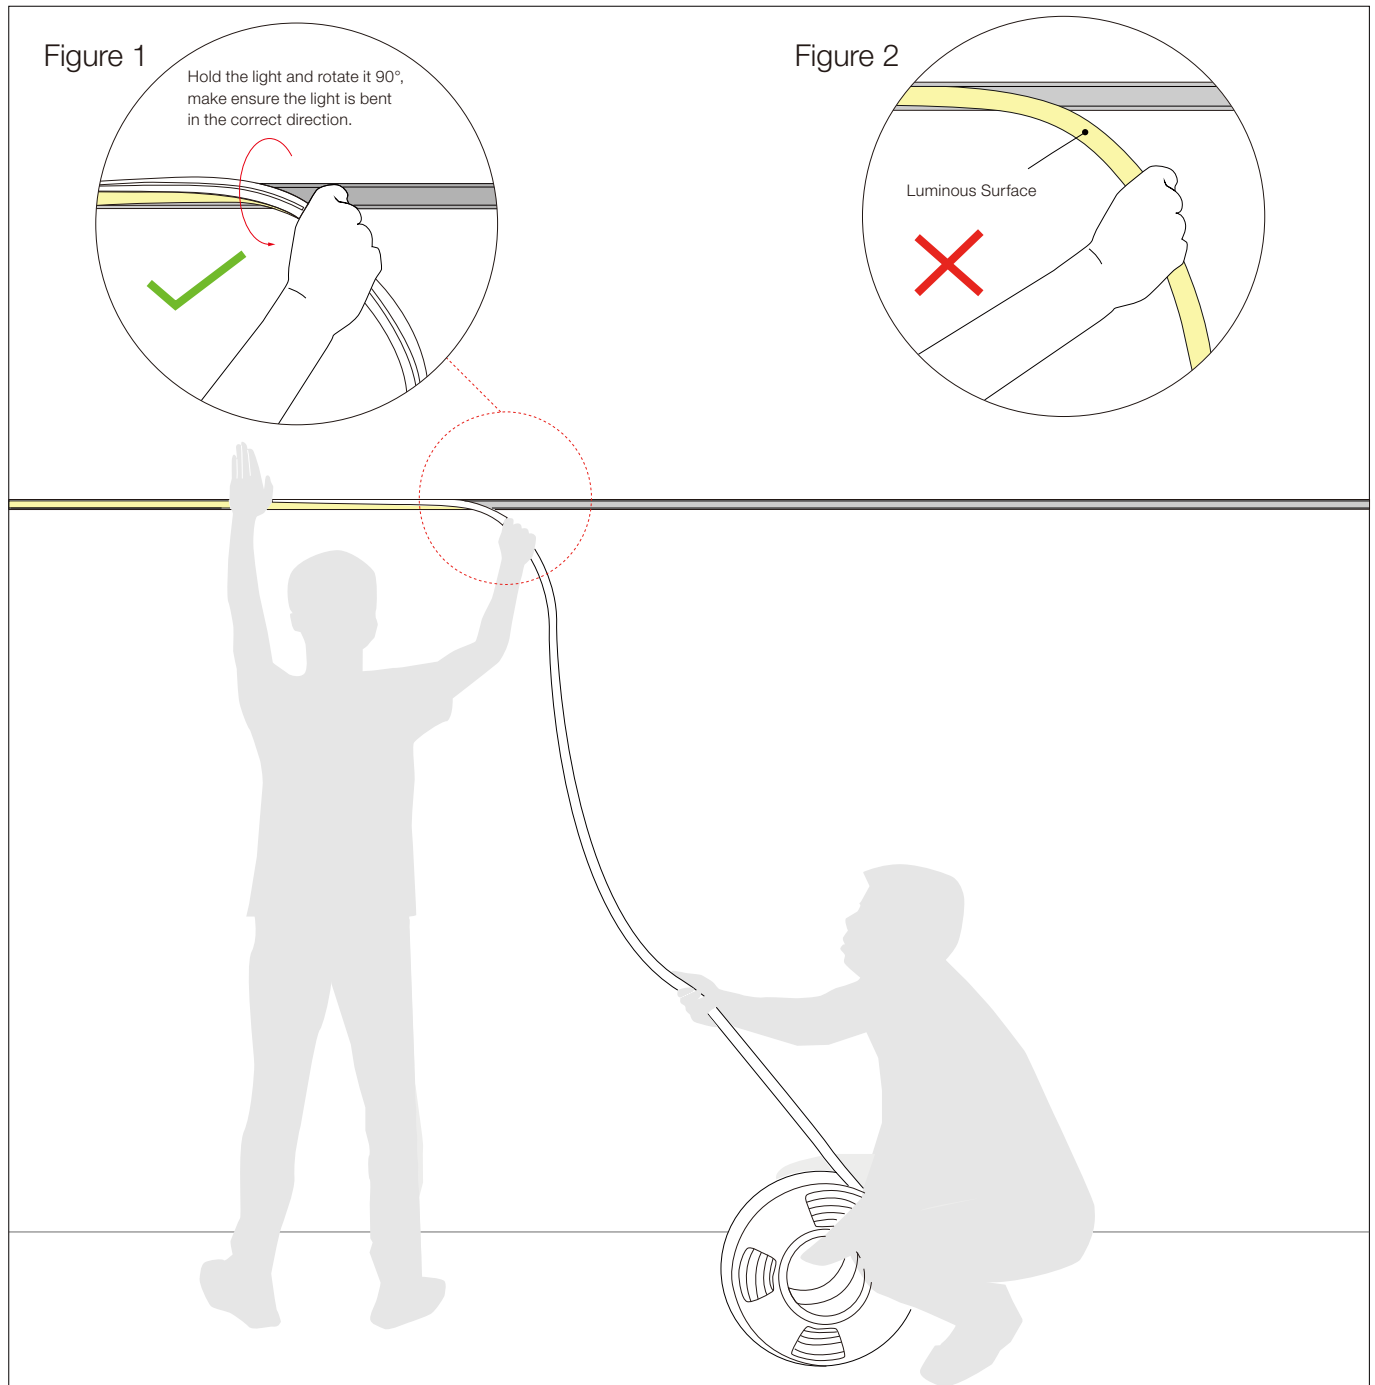
Installation Precautions--Side Mounted (If the length of the light is more than 2 meters, two persons must work together to install it.)**1.Installer:**

- Press the light with the palm of the left hand to slowly load it into the slot. Straighten the light with right hand, hold it and rotate it 90° to droop it in the direction of your hand. See Figure 1.
- Do not bend the luminous surface to the side. See Figure 2.

2.Assistant:

- Cooperate with the installer to lift the reel of the light, and then slowly deliver the light to installer. Do not pull or twist the light during the installation.

Installation Precautions--Top Mounted (If the length of the light is more than 2 meters, two persons must work together to install it.)

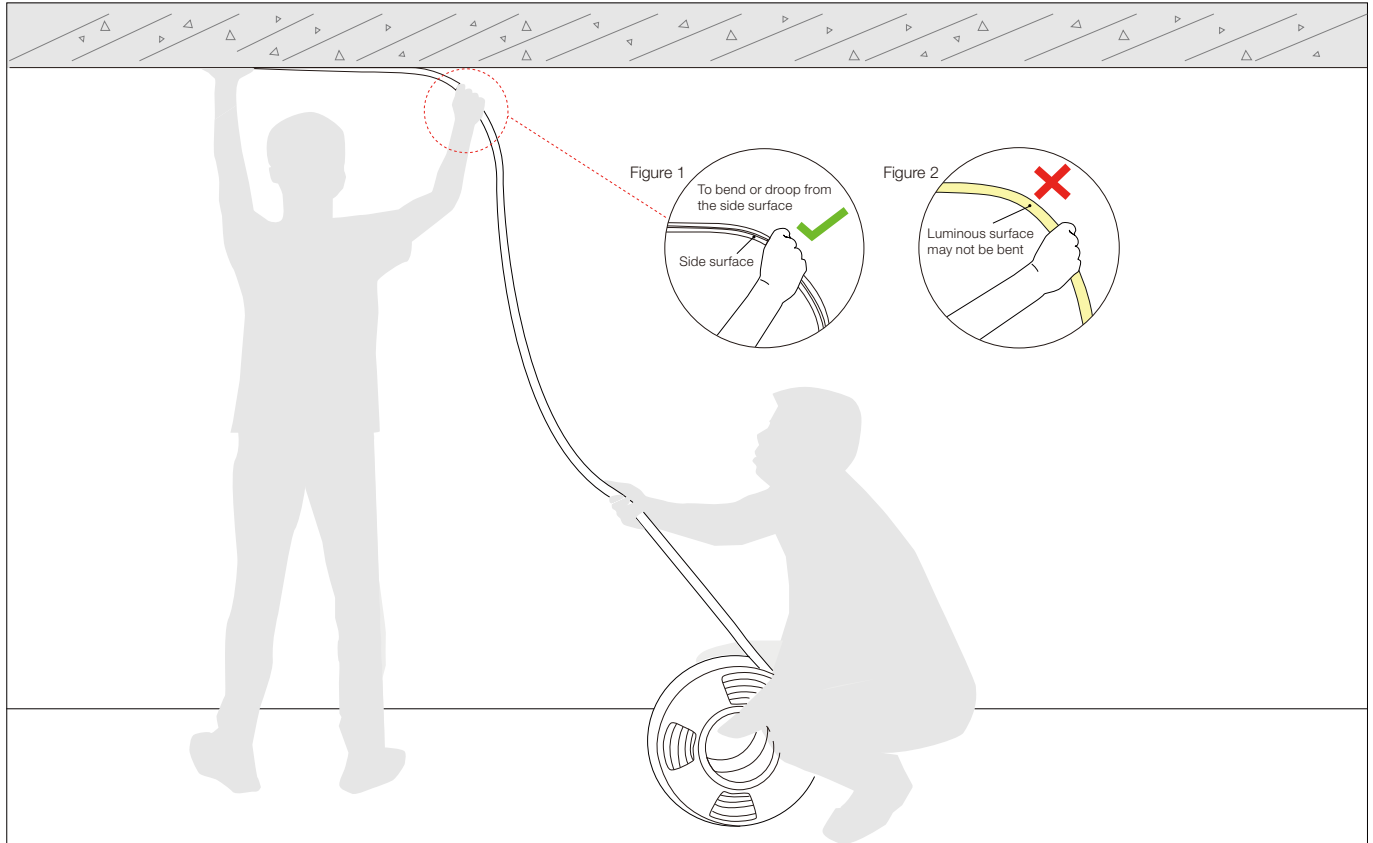

1.Installer:

- Press the light with the palm of the left hand to slowly load it into the slot. Straighten the light with your right hand so that it droop naturally. See Figure 1.
- Luminous surface may not be bent. See Figure 2.

2.Assistant:

- Cooperate with the installer to slowly deliver the light to installer. Do not pull or twist the light during the installation.

Notes

The selection of the cable specification at the output end of the power supply, it depends on the total current of the load and the length of the cable. It is recommended to select according to the following table:

Current of the light	Specifications of the cable								
	L=1M	L=2M	L=4M	L=6M	L=8M	L=10M	L=12M	L=14M	L=16M
1A	AWG26	AWG23	AWG21	AWG18	AWG18	AWG17	AWG16	AWG15	AWG15
2A	AWG23	AWG21	AWG18	AWG16	AWG15	AWG14	AWG13	AWG12	AWG12
3A	AWG22	AWG18	AWG16	AWG14	AWG13	AWG12	AWG11	AWG11	AWG10
4A	AWG21	AWG18	AWG15	AWG13	AWG12	AWG11	AWG10	AWG9	AWG9
5A	AWG20	AWG17	AWG14	AWG12	AWG11	AWG10	AWG9	AWG9	AWG8
6A	AWG18	AWG16	AWG13	AWG11	AWG10	AWG9	AWG8	AWG8	AWG7
7A	AWG18	AWG15	AWG12	AWG11	AWG9	AWG8	AWG8	AWG7	AWG6
8A	AWG17	AWG15	AWG12	AWG10	AWG9	AWG8	AWG7	AWG7	AWG6
9A	AWG17	AWG14	AWG11	AWG10	AWG8	AWG7	AWG7	AWG6	AWG5
10A	AWG16	AWG14	AWG11	AWG9	AWG8	AWG7	AWG6	AWG6	AWG5

- ※ The unused light should be sealed with the packaging bag to avoid prolonged exposure.
- ※ Please use DC24V isolated constant voltage power supply with ripple voltage less than 5%. Using other types of power supply may damage the light or cause other safety risks.
- ※ In practical application, 20% allowance should be reserved for power supply to ensure the stability of power supply.
- ※ It is recommended that professionals connect the power supply. Do not connect the power supply with live power to avoid electric shock.
- ※ Please confirm whether the voltage of the power supply is consistent with the voltage of the light; Pay attention to the positive and negative poles of the power cord, do not connect wrong, so as not to cause product damage;
- ※ When multiple power supplies are used, ensure that the positive poles of the power supply are not connected in parallel. Otherwise, the power supply system may be unstable or damaged after long-term operation.
- ※ If the actual application length exceeds the specified length, it will lead to overload, heating and uneven brightness of the light.
- ※ During installation, please do not scratch, twist, or bend the light irregularly. Otherwise, the light may be damaged beyond repair.
- ※ To ensure the life and reliability of the light, please do not over bend the light, which will damage the product itself.
- ※ To protect your eyes, please avoid staring at the glowing surface of the light for a long time.
- ※ Non-professionals are forbidden to install, disassemble and maintain the product.
- ※ Do not use any acid or alkaline adhesive to fix the light (including but not limited to glass glue, etc.)
- ※ IP67 products are not suitable for long-term immersion in water; IP68 products are only customized by the factory. After cutting and processing by users themselves, there is a risk that IP68 protection level cannot be reached
- ※ Because of the difference in structure, even if the same color temperature value, different sizes of light will look slightly different colors. Please confirm it before use.

Tests showed that methanol and benzenes will have yellowing effects on silicone.

In the newly decorated interior environment, epoxy floor paint, wall paint, wallpaper adhesive, various decoration materials or new furniture, they are likely to release of methanol and benzenes.

It is recommended to remove methanol and benzenes first, or ventilate for a period of time in the newly decorated interior environment before install the silicone neon light, to avoid affecting the silicone body.