

LightMAX


R0D14

24 power LED module



7 YEARS WARRANTY

CC CONSTANT CURRENT

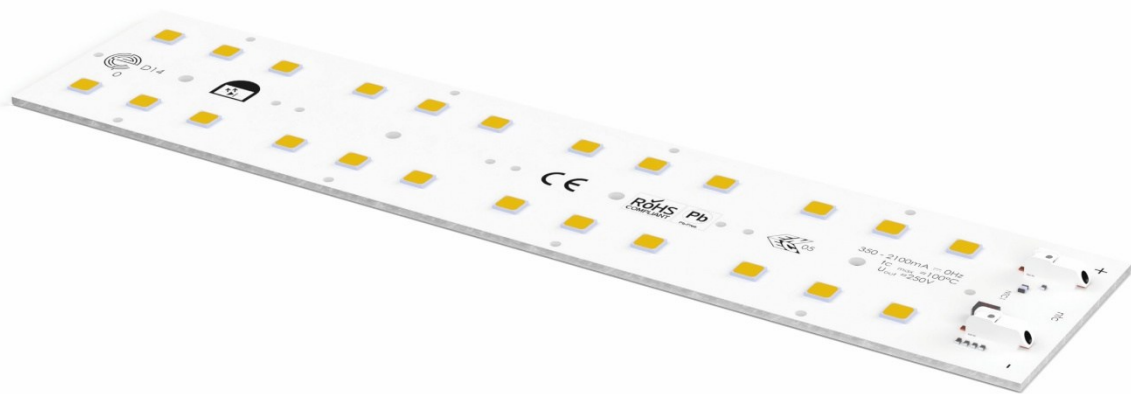

FEATURES

- PCB dimension: 220x50mm
- Up to 11703 lm
- Up to 198 lm/W
- CRI 70
- Max Electrical Insulation 250V
- Max 5 LED boards in series
- Connection type: 2 x Wago 2060 4mm 1 pole
- Lifetime > 100000h @ 700mA < 1050mA L90B10
- Designed for 2x3 lens


APPLICATIONS




Street



Industrial



Area



High Bay

LightMAX

R0D14

24 power LED module

7 YEARS WARRANTY



CC CONSTANT CURRENT

Code	CCT	CRI	Current [mA]	Voltage [V]	Power [W]	Total Lumen [lm]	Lm/W	Energy Efficiency
R0D14012770	2700K	70	700	44	30.8	5679	184	C
			1000	44.8	44.8	7974	178	C
			1400	45.6	63.8	10904	171	D
R0D14013070	3000K		700	44	30.8	5829	189	C
			1000	44.8	44.8	8186	183	C
			1400	45.6	63.8	11193	175	C
R0D14014070	4000K		700	44	30.8	6095	198	C
			1000	44.8	44.8	85558	191	C
			1400	45.6	63.8	11703	183	C
R0D14015070	5000K		700	44	30.8	6095	198	C
			1000	44.8	44.8	85558	191	C
			1400	45.6	63.8	11703	183	C

Flux tolerance +/- 10%
Vf Tolerance +/- 5%

Ask for more information about available LED and other options.

LED and board features	
LED number	24
LED type	5050
Circuit	S8P3
Material	Aluminium
Solder	White
Connections	
Cable	Solid 0,2-0,8mm ² Strand 0,45-0,7mm ²
Connector	2x Wago 4mm 2 pole (2 WITH NTC option)
Power	
Abs. Max Input current CC	2100mA
Mechanical Data	
L x H	220.8x50mm
Thickness	6.1
Conditions	
Max. temp. (Tp)	105°C
Max. temp. (Tc)	100°C
Operating temp. Range	-40 +65°C

LightMAX

R0D14


24 power LED module

7 YEARS WARRANTY




CC CONSTANT CURRENT

MECHANICAL DRAWING

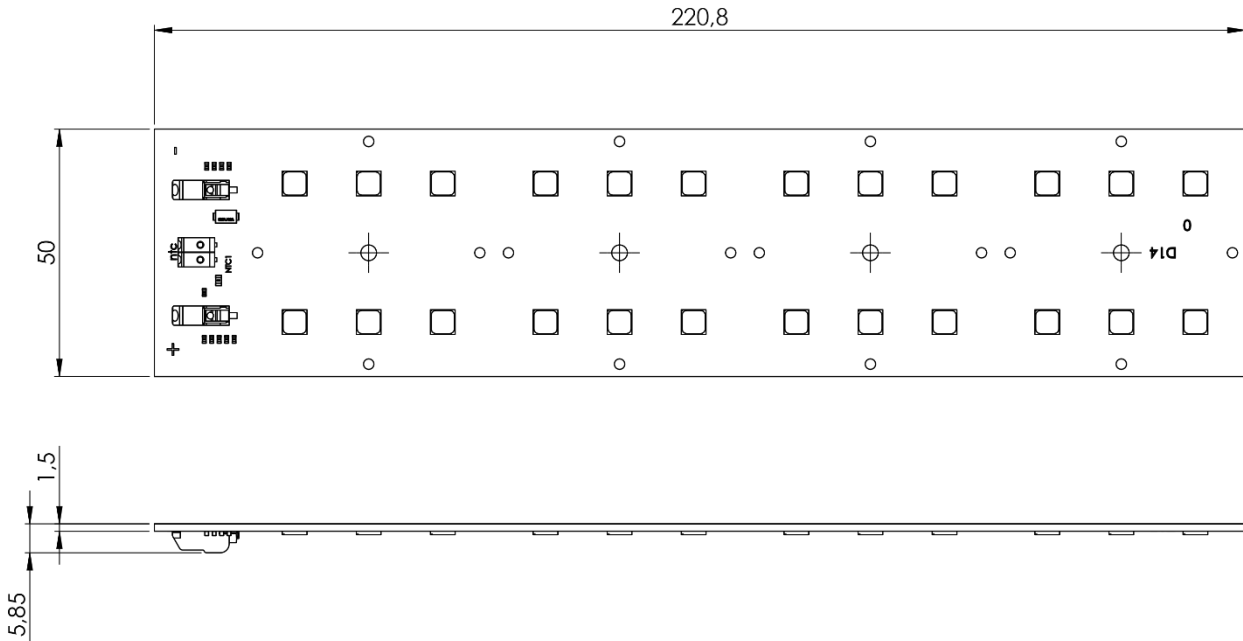

ELECTRICAL CIRCUIT

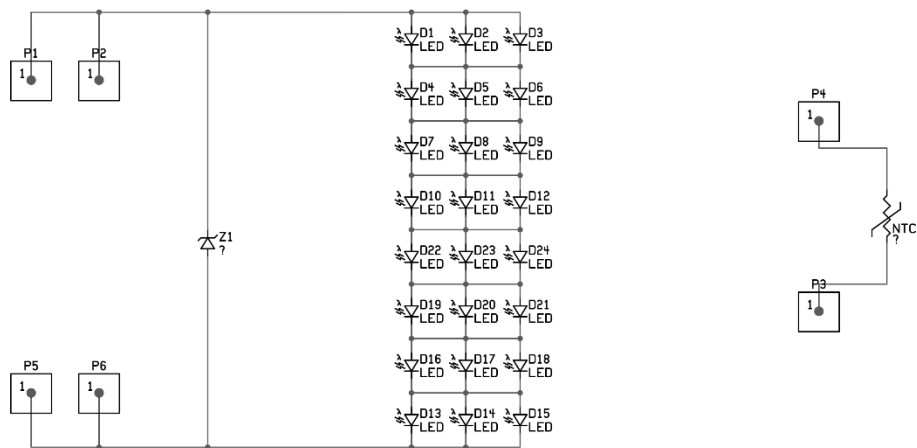

LightMAX

R0D14

Accessories: LEDiL lens

7 YEARS WARRANTY



CC CONSTANT CURRENT



Specifications HB-2X3-5050 / STRADA-2X3-5050	
Models	HB-2X3-5050-M HB-2X3-5050-WW HB-2X3-5050-WWW HB-2X3-5050-UW STRADA-2X3-5050-T2 STRADA-2X3-5050-T3 STRADA-2X3-5050-VSM
Material	PMMA
Type	6in1
Efficiency	Up to 96%
Operating Temperature	-40°C ~ +70°C

ASSEMBLY AND SAFETY INFORMATION

The LED modules are designed to be incorporated in a final appliance. Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnected from the mains). Additionally, the following advice must be observed; non-observance can result in electrical, mechanical and/or fire hazards.

- ESD (electrostatic discharge) protection measures must be observed when handling and installing the LED modules.
- Transient protection measures (as per IEC 61000-4-5), especially for outdoor applications, must be observed (e.g. SPD).
- Adequate anti-static electricity measures, including the use of conductive shoes, ionizers, work bench grounding, wrist straps, flooring and stools should be used.
- LED assembly modules must not be subjected to any undue mechanical stress, e.g.:
 - Do not treat as bulk cargo.
 - Avoid sharing and compressive forces during handling and installation.
 - Do not damage circuit paths.
 - Avoid any pressure on the light emitting surface.
- Safe operation is only possible using proper external sources (e.g: constant current sources - I_{max}. see table "Electrical Characteristics").
- Operate only with power supply units that feature the following protection:
 - Short-circuit protection
 - Overload protection
 - Overheating protection
- The module can be fixed with M3 screws. They are recommended to be fixed only with flat or cylinder head screws (M3) (no countersunk screws – if not differently specified). Max. torque: 1.2 Nm (M3)
- Please ensure the correct polarity of the leads prior to applying power. Reversed polarity can destroy the modules.
- For interconnection, the LED modules are usually equipped with push-in terminals. Custom connectors are available upon request during the project bidding stage.
- General Safety regulations acc. to IEC/EN 60598-1 (or specific standards related to different lighting applications) must be observed.
- The following points must be observed when connecting LED modules in parallel:
 - All LED strings that are wired in parallel must contain the same number of LEDs (symmetrical loading).
 - Owing to differing forward voltage, there can be a difference of up to 10% in brightness between modules connected in parallel.
 - For this installation setup, please notify us when placing your order.
- To ensure problem-free operation, the specified maximum temperature at the tp point (see "Operating Life") must be observed (and measured in accordance with IEC 62717 – Annex H).
- In the event of outdoor applications or applications in damp locations, care must be taken to protect LED modules against humidity, splashes and jets of water. Any corrosion damage resulting from humidity or contact with condensation will not be recognized as a defect or manufacturing fault. LED modules are not specifically protected against foreign bodies or dust. Depending on the type of application, further protection must be provided to prevent ingress.
- Due to the manufacturing process, the PCBs of the LED modules can have sharp edges and corners. Care must therefore be taken during handling and installation to avoid injury.
- Constant current drivers require for an optimal usage that the modules are connected in series. For this type of usage, there must be ensured that the quantity of LED modules is limited by the sum of forward voltage and the capacity of used constant current driver. Safety regulations acc. to IEC/EN 60598 must be observed if the sum of forward voltage exceeds the permitted touchable value.
- There is a list of chemical substances (as sulfur) that has been proved to make the LED module damaged. Also, in chemically enriched (aggressive) environments the LED module functionality can be compromised, or they can even cause total module failure. Keep attention to this aspect before installing the LED module.
- The photobiological safety of the LED modules must be classified into risk groups in accordance with IEC/EN 62471 and IEC/EN 62471-7.

APPLIED STANDARDS

IEC / EN 62031

LED modules for general lighting – Safety specifications

IEC 62717

LED modules for general lighting - Performance requirements

IEC/EN 60598-1

Luminaires – Part 1: General requirements and tests

IEC/EN 62471

Photobiological safety of lamps and lamp systems

IEC 61000-4-5

Electromagnetic compatibility (EMC) – Part 4-5: Testing and measurement techniques – Surge immunity test