



Features

- Two options available:
 - 12 LED/m – PCB 8mm
 - 30 LED/m – PCB 10mm
- 24 Vdc
- Wavelength: 275nm \pm 5
- Lifetime >15,000 hrs 60%
- Top 45°C max
- IP20
- Up to 240mW/m UVC



Applications



Safety advices

Some LED UV products emit ultraviolet light (<400nm). Don't look at operating LEDs. Eye injury may result. Use necessary skin and eyes protection. Assume IEC62471 Risk Group 3.



275nm 24Vdc UVC LED Strip

Code	Wavelength	Voltage [V]	LED/m	LED	Power/m [W]**	mW/m*	mW/LED*
U7UVC04BF250N0	275nm	24Vdc	12	URP	3,8	30	2mW
U7UVC04BF250N1			30		11	75	
U7UVC04BF250N3			12	URT	8	96	8mW
U7UVC04BF250N4			30		22	240	
Customization option available	275nm + special wavelength						

* Typical Value refers to datasheet Tj=25°C

** Tolerance +/- 10%

*Value refers to Spectrometer test

Test Conditions:


Temperature: 26°C Int. 24,31°C

Humidity: 25%


Led and board features	
Led number	12 LED/mt - 30 LED/mt
Led	3737
Circuit	3 series with resistors
Connections	
Cable	2x0,5mm black/white
Power	
Abs. Max Input Voltage	28 Volt DC
Mechanical Data	
H x L	8mm x 2500mm
Total Thickness	3,5mm
Conditions	
Max. temp. (Tp)	40°C
Max. temp. (Tc)	45°C
Operating temp. Range	-20+30°C

275nm 24Vdc UVC LED Strip


Drawing – 12 LED/m

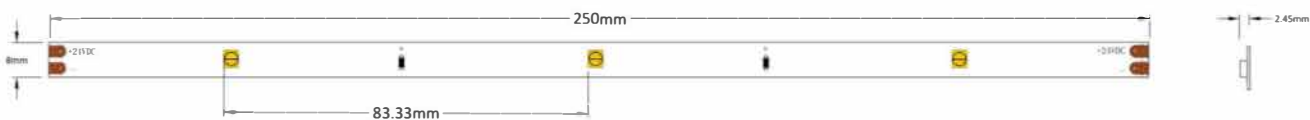


Drawing – 30 LED/m

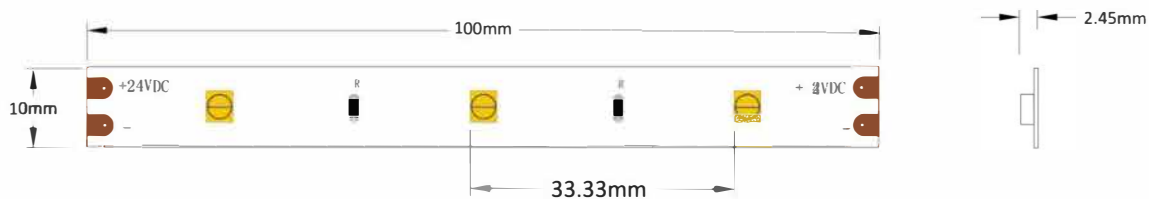

Spectral characteristic

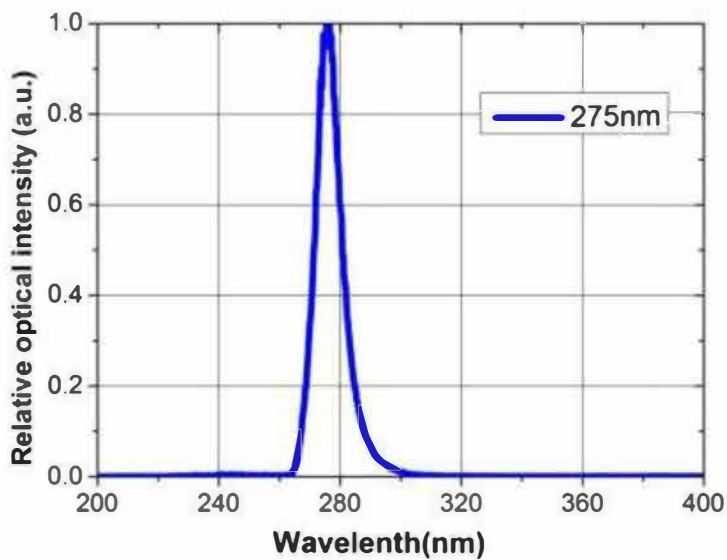


Bactericidal Wavelength Effect

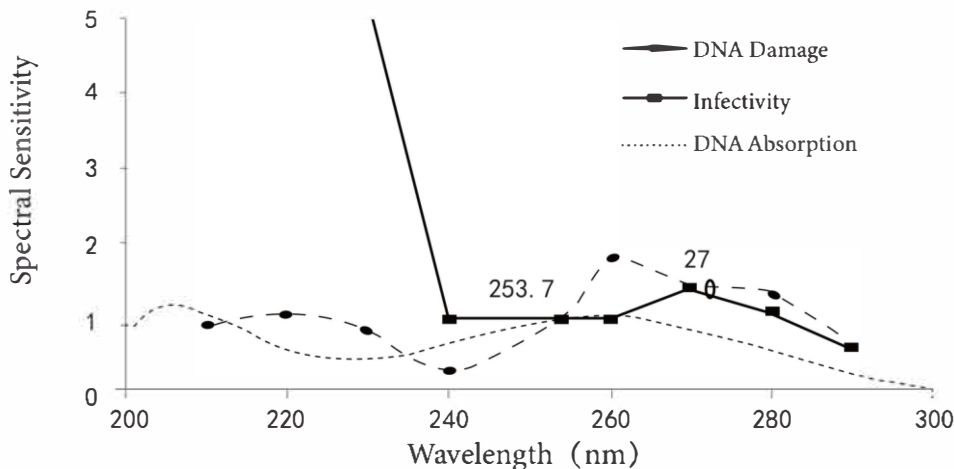


DNA Destruction Capacity: 260nm > 270nm ≈ 280nm > 253.7nm


Wiring Diagram Application

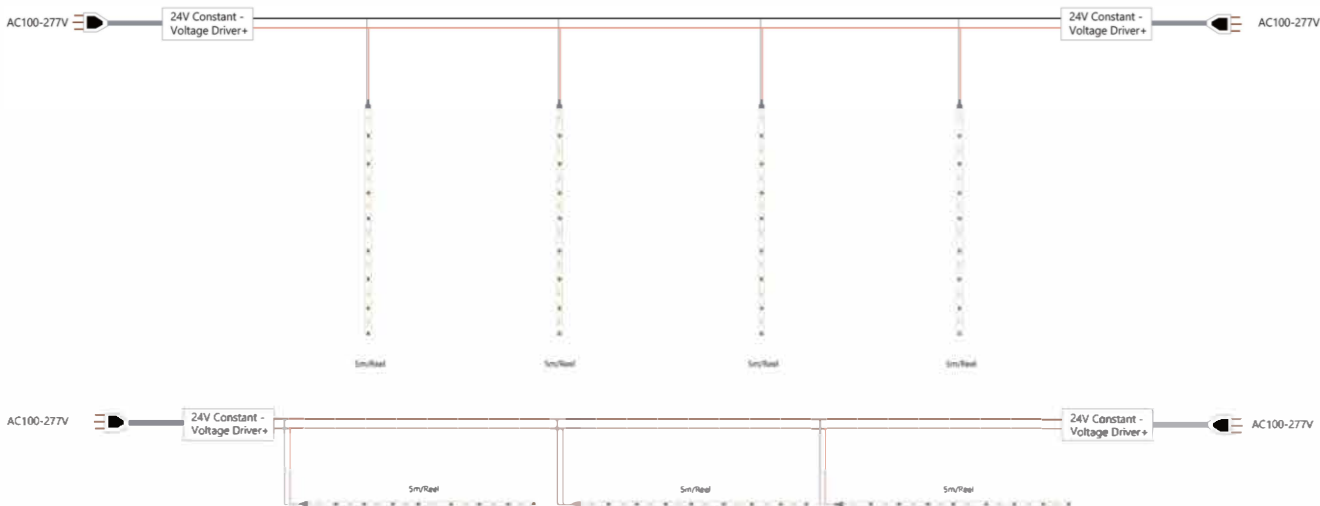

Cautions

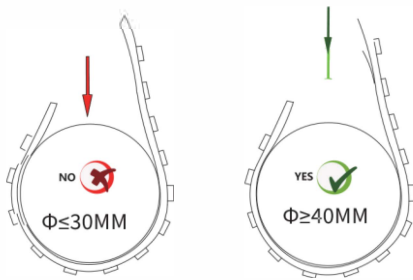

<50mm diameter of wrapped object prohibited

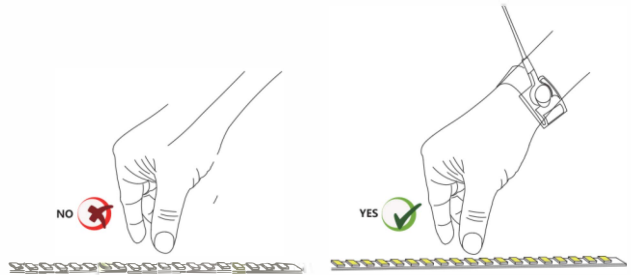

Pls wear the electrostatics ring for avoid ESD

Safety & Disclosures

1. Do not install the led strip in environment where excessive heat may occur.
2. Do not extend beyond the recommended maximum run length.
3. Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
4. Do not install IP20 LED strip products in outdoor / wet location environments.
5. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
6. Improper wire selection and installation could overheat wires, and cause fire.
7. Do not connect directly to high voltage or AC power.
8. Installation must be in accordance with local and national electrical code regulations.
9. To ensure safety and correct installation, our strips are intended to be installed by a qualified, licensed electrician.

Safety tips

1. Please put it in a place that is hard for children to get and avoid children's use.
2. Please don't face other people's eyes when using germicidal lamp.
3. When using germicidal lamp, please keep more than 5cm away from the skin of yourself or others.

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. The LED modules are designed for operation within a casing or luminaire. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains).

The following advice must be observed; non-observance can result in the destruction of the LED assembly modules, fire and/or other hazards.

- Consider safety regulations acc. EN 60598 in the luminaire design, especially when the operating LED driver is not galvanic isolated.
 - In mode of operation regard to sufficient isolation.
 - Live parts must not be touched in operation mode. Danger in life!!!
- ESD (electrostatic discharge) protection measures must be observed when handling and installing the LED modules. See VS's application notes on ESD protection.
- Adequate anti-static electricity measures, including the use of conductive shoes, ionizers, work bench grounding, wrist straps, flooring and stools should be used.
- LED assembly modules must not be subjected to any undue mechanical stress, e. g.:
 - do not treat as bulk cargo
 - avoid shear and compressive forces during handling and installation
 - do not damage circuit paths
 - avoid any pressure on the light emitting surface
- Safe operation only possible by the use of external constant current sources (Imax. see table "Electrical Characteristics").
- Operation only with power supply units that feature the following protection:
 - Short-circuit protection
 - Overload protection
 - Overheating protection
- The module can be fixed with M3 screws. Fixation only with flat or cylinder head screws (M3) (no countersank screws) Max. torque: 1.2 Nm (M3)
- Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- For interconnection the LED modules is equipped with push-in terminals (WAGO 2060).
- Safety regulations acc. to EN 60598 (or further standards) has to be observed if the maximum output voltage exceed the permitted touchable value.
- The following points must be observed when connecting LED modules in parallel:
 - All LED strings that are wired in parallel must contain the same number of LEDs (symmetrical loading).
 - Owing to differing forward biases, there can be a difference of up to 10% in brightness between modules connected in parallel.
- To ensure problem-free operation, the specified maximum temperature at the tp point (see "Operating Life") must be observed (and measured in accordance with EN 60598-1). To satisfy this point, it may be necessary to put measures in place to ensure any heat is dissipated from the PCB to the environment.
- In the event of outdoor applications or applications in damp locations, care must be taken to protect LED assembly modules against humidity, splashes and jets of water. Any corrosion damage resulting from humidity or contact with condensation will not be recognized as a defect or manufacturing fault. LED assembly modules are not specially protected against foreign bodies or dust. Depending on the type of application, further protection must be ensured to prevent dust and foreign bodies from entering.
- Due to the manufacturing process, the PCBs of the LED assembly modules can have sharp edges and corners. Care must therefore be taken during handling and installation to avoid injury.
- For optimal load of used constant current driver the modules can only be connected in series. The quantity of LED modules is limited by the sum of forward voltage and the capacity of used constant current driver. Safety regulations acc. to EN 60598 has to be observed if the sum of forward voltage exceed the permitted touchable value.
- Operating LED modules in the presence of certain chemical substances or in chemically enriched (aggressive) environments can impair module functionality or even cause total module failure.
- The photobiological safety of the LED modules must be classified into risk groups in accordance with IEC / TR 62778:
 - risk group 1 (except HB, 6500 K, > 500 mA: risk group 2)

Applied Standards

IEC / EN 62031
LED modules for general lighting – Safety specifications

IEC / TR 62778
Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires