
LineMAX

R1506

8 LEDs linear module for backlight

5 YEARS WARRANTY

CV CONSTANT VOLTAGE

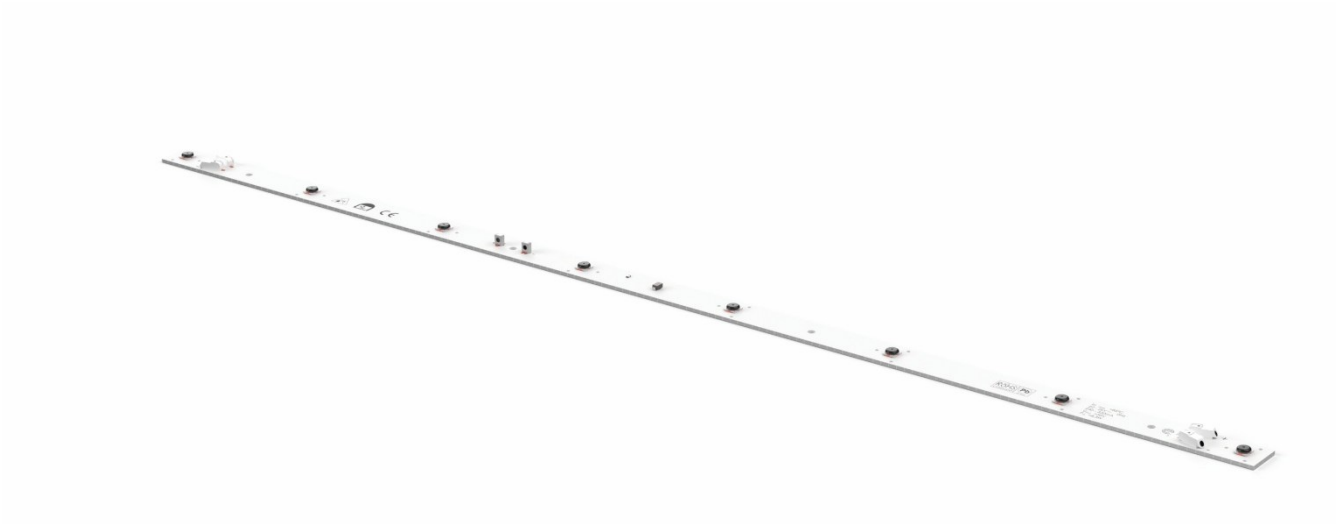

FEATURES

- New version with 6060 LEDs and 160° batwing optics
- PCB dimension: 599x18mm
- Up to 670 lm
- Up to 100 lm/W
- CRI 80, 90
- All CCT available on request
- Max Electrical Insulation 250Vdc
- Connection type: Wago 2060 series or AVX IDC contact
- Max 10 LED boards in parallel with 2060 connectors, no limits with AVX connectors
- Lifetime > 60000h @ 65°C L70B50

APPLICATIONS

Backlight

Universal Science S.r.l. - Sole shareholder company
Via Adige 30 – 20006 Pregnana Milanese (MI) - Italy
sales@redmade.it | www.redmade.it

LineMAX

R1506

8 LEDs linear module for backlight

5 YEARS WARRANTY

CV CONSTANT VOLTAGE

Code	CCT	CRI	Current [mA]	Voltage [V]	Power [W]	Total Lumen [lm]	Lm/W	Energy Efficiency
R1506114080	4000K	80	280	24	6,7	670	100	F
R1506116580	6500K		280		6,7	670	100	F
R1506114090	4000K	90	280		6,7	578	86	G
R1506116590	6500K		280		6,7	578	86	G

Flux tolerance +/- 10%
Vf Tolerance +/- 0,5Volt

Ask for more information about available LED and other options.

LED and board features	
LED number	8
LED type	6060 Batwing
Circuit	CV 24V
Material	FR4
Solder	White
Connections	
Cable	Solid Wires/Strand Wires 0,2 – 0,8 mm² (AWG 24 to 18) | Strip length 7 – 9 mm
Connector	4 x WAGO 2060 Series 1 P (or 2 x AVX IDC contact 1 way 00-9176-001-65x-906)
Power	
Abs. Max Input Voltage	25Vdc
Mechanical Data	
H x L	18x599mm
Thickness	7mm
Conditions	
Max. temp. (Tp)	+85°C
Max. temp. (Tc)	+80°C
Operating temp. Range	-30°C / +55°C

Universal Science S.r.l. - Sole shareholder company
Via Adige 30 – 20006 Pregnana Milanese (MI) - Italy
sales@redmade.it | www.redmade.it

LineMAX


R1506

8 LEDs linear module for backlight


5 YEARS WARRANTY

CV CONSTANT VOLTAGE

MECHANICAL DRAWING

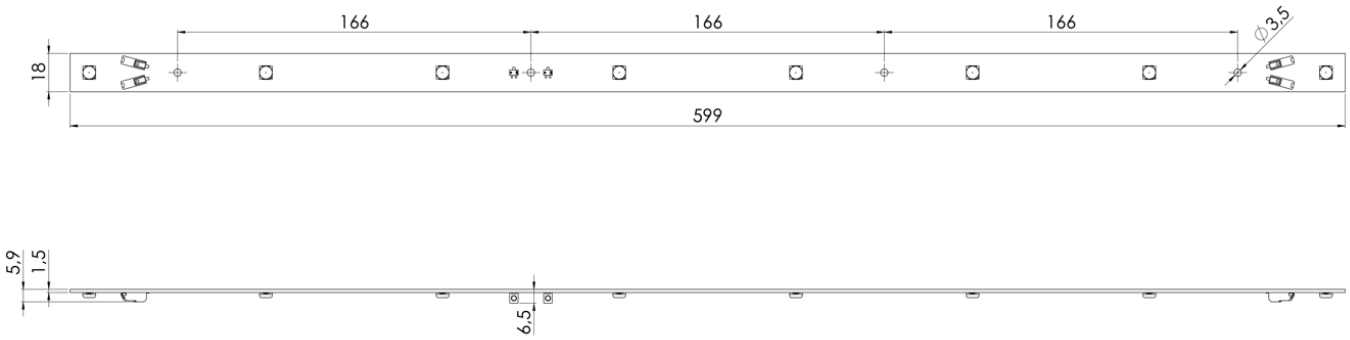

ELECTRICAL CIRCUIT

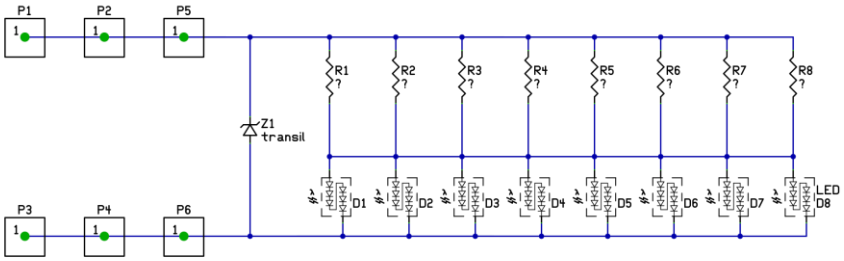

LineMAX


R1506

8 LEDs linear module for backlight


5 YEARS WARRANTY

CV CONSTANT VOLTAGE

BACKLIGHT SERIES - DRAWINGS

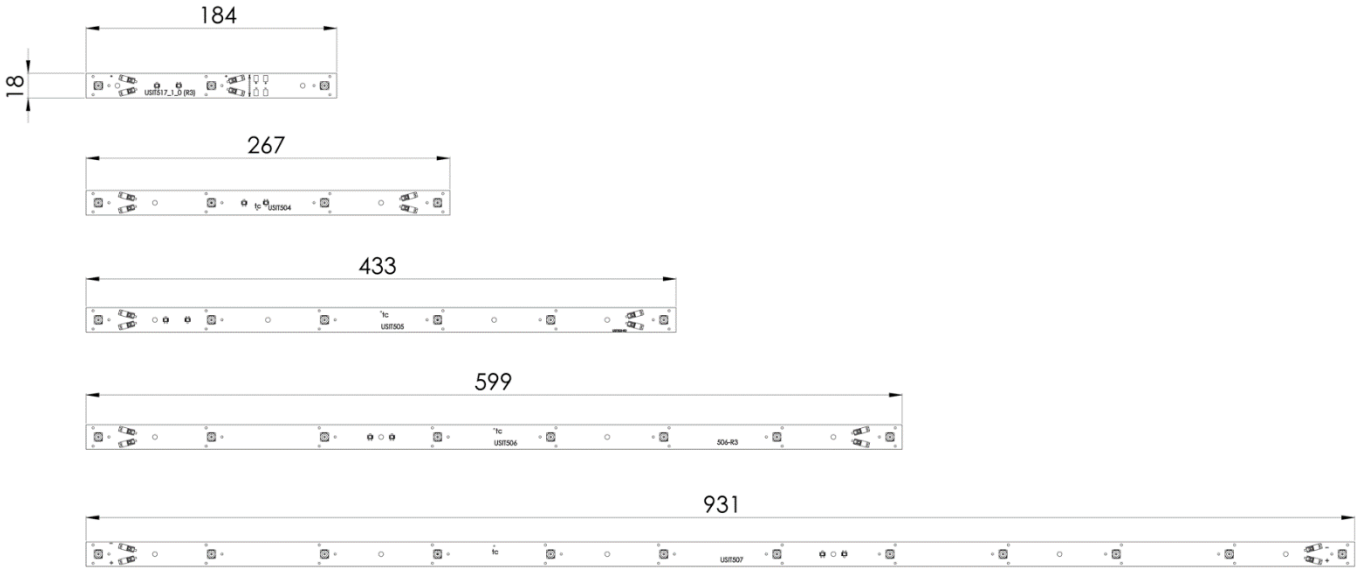

RECOMMENDED

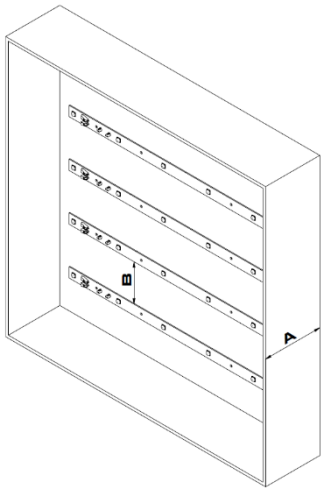

Thickness of the panel (A)	Bar to bar distance (B)	Qty/m²
5cm	11cm	8 pcs
8cm	11cm	8 pcs
10cm	13cm	7 pcs
12cm	15cm	6 pcs

*The values may change according to the type of diffuser sheet.

Universal Science S.r.l. - Sole shareholder company
Via Adige 30 – 20006 Pregnana Milanese (MI) - Italy
sales@redmade.it | www.redmade.it

ASSEMBLY AND SAFETY INFORMATION

The LED modules are designed to be incorporated in a final appliance. Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnected from the mains).
Additionally, the following advice must be observed; non-observance can result in electrical, mechanical and/or fire hazards.

- ESD (electrostatic discharge) protection measures must be observed when handling and installing the LED modules.
- Transient protection measures (as per IEC 61000-4-5), especially for outdoor applications, must be observed (e.g. SPD).
- Adequate anti-static electricity measures, including the use of conductive shoes, ionizers, work bench grounding, wrist straps, flooring and stools should be used.
- LED assembly modules must not be subjected to any undue mechanical stress, e.g.:
  - Do not treat as bulk cargo.
  - Avoid sharing and compressive forces during handling and installation.
  - Do not damage circuit paths.
  - Avoid any pressure on the light emitting surface.
- Safe operation is only possible using proper external sources (e.g: constant current sources - Imax. see table "Electrical Characteristics").
- Operate only with power supply units that feature the following protection:
  - Short-circuit protection
  - Overload protection
  - Overheating protection
- The module can be fixed with M3 screws. They are recommended to be fixed only with flat or cylinder head screws (M3) (no countersunk screws – if not differently specified). Max. torque: 1.2 Nm (M3)
- Please ensure the correct polarity of the leads prior to applying power. Reversed polarity can destroy the modules.
- For interconnection, the LED modules are usually equipped with push-in terminals. Custom connectors are available upon request during the project bidding stage.
- General Safety regulations acc. to IEC/EN 60598-1 (or specific standards related to different lighting applications) must be observed.
- The following points must be observed when connecting LED modules in parallel:
  - All LED strings that are wired in parallel must contain the same number of LEDs (symmetrical loading).
  - Owing to differing forward voltage, there can be a difference of up to 10% in brightness between modules connected in parallel.
  - For this installation setup, please notify us when placing your order.
- To ensure problem-free operation, the specified maximum temperature at the tp point (see "Operating Life") must be observed (and measured in accordance with IEC 62717 – Annex H).
- In the event of outdoor applications or applications in damp locations, care must be taken to protect LED modules against humidity, splashes and jets of water. Any corrosion damage resulting from humidity or contact with condensation will not be recognized as a defect or manufacturing fault. LED modules are not specifically protected against foreign bodies or dust. Depending on the type of application, further protection must be provided to prevent ingress.
- Due to the manufacturing process, the PCBs of the LED modules can have sharp edges and corners. Care must therefore be taken during handling and installation to avoid injury.
- Constant current drivers require for an optimal usage that the modules are connected in series. For this type of usage, there must be ensured that the quantity of LED modules is limited by the sum of forward voltage and the capacity of used constant current driver. Safety regulations acc. to IEC/EN 60598 must be observed if the sum of forward voltage exceeds the permitted touchable value.
- There is a list of chemical substances (as sulfur) that has been proved to make the LED module damaged. Also, in chemically enriched (aggressive) environments the LED module functionality can be compromised, or they can even cause total module failure. Keep attention to this aspect before installing the LED module.
- The photobiological safety of the LED modules must be classified into risk groups in accordance with IEC/EN 62471 and IEC/EN 62471-7.

APPLIED STANDARDS

IEC / EN 62031
LED modules for general lighting – Safety specifications

IEC 62717
LED modules for general lighting - Performance requirements

IEC/EN 60598-1
Luminaires – Part 1: General requirements and tests

IEC/EN 62471
Photobiological safety of lamps and lamp systems

IEC 61000-4-5
Electromagnetic compatibility (EMC) – Part 4-5: Testing and measurement techniques – Surge immunity test

Universal Science S.r.l. - Sole shareholder company
Via Adige 30 – 20006 Pregnana Milanese (MI) - Italy
sales@redmade.it | www.redmade.it