

DotMAX

R3887

XHP35 35mm spot module



5 YEARS WARRANTY

CC CONSTANT CURRENT



FEATURES

- PCB dimension: 35mm
- Up to 1007 lm
- Up to 135 lm/W
- CRI 80, 90
- Max Electrical Insulation 250V
- Max 20 LED boards in series
- Connection type: WAGO 2059 series 1 pole
- Lifetime >60000h @ 700mA


APPLICATIONS




Commercial



Office



Spotlight



Downlight

DotMAX

R3887

XHP35 35mm spot module



5 YEARS WARRANTY

CC CONSTANT CURRENT

Code	CCT	CRI	Current [mA]	Voltage [V]	Power [W]	Total Lumen [lm]	Lm/W	Energy Efficiency
R3887002780	2700K	80	350	1.4	3.99	440	110	F
			700	1.76	8.23	841	102	F
R3887003080	3000K		350	1.2	3.92	410	104	F
			700	1.7	8.19	810	99	F
R3887004080	4000K		350	1.2	3.92	530	135	F
			700	1.7	8.19	1007	123	F
R3887002790	2700K	90	350	1.4	3.99	380	95	F
			700	1.76	8.23	760	92	F
R3887003090	3000K		350	1.2	3.92	420	107	F
			700	1.7	8.19	800	98	F
R3887004090	4000K		350	1.2	3.92	400	102	F
			700	1.7	8.19	760	93	F

Flux tolerance +/- 10%
Vf tolerance +/- 5%

Ask for more information about available LED and other options.

DotMAX

R3887

XHP35 35mm spot module



5 YEARS WARRANTY

CC CONSTANT CURRENT

LED and board features	
LED number	-
LED type	3535
Circuit	SIP
Material	Aluminium
Solder	Black
Connections	
Case	WAGO 2059
Power	
App. Max. input current CC	150 mA
Mechanical Data	
Diameter	35 mm
Thickness	4.30 mm
Conditions	
Max. temp. (Ta)	190°C
Max. temp. (Tc)	185°C
Operating temp. Range	-40°C 85°C

DotMAX

R3887


XHP35 35mm spot module




5 YEARS WARRANTY

CC CONSTANT CURRENT

MECHANICAL DRAWING

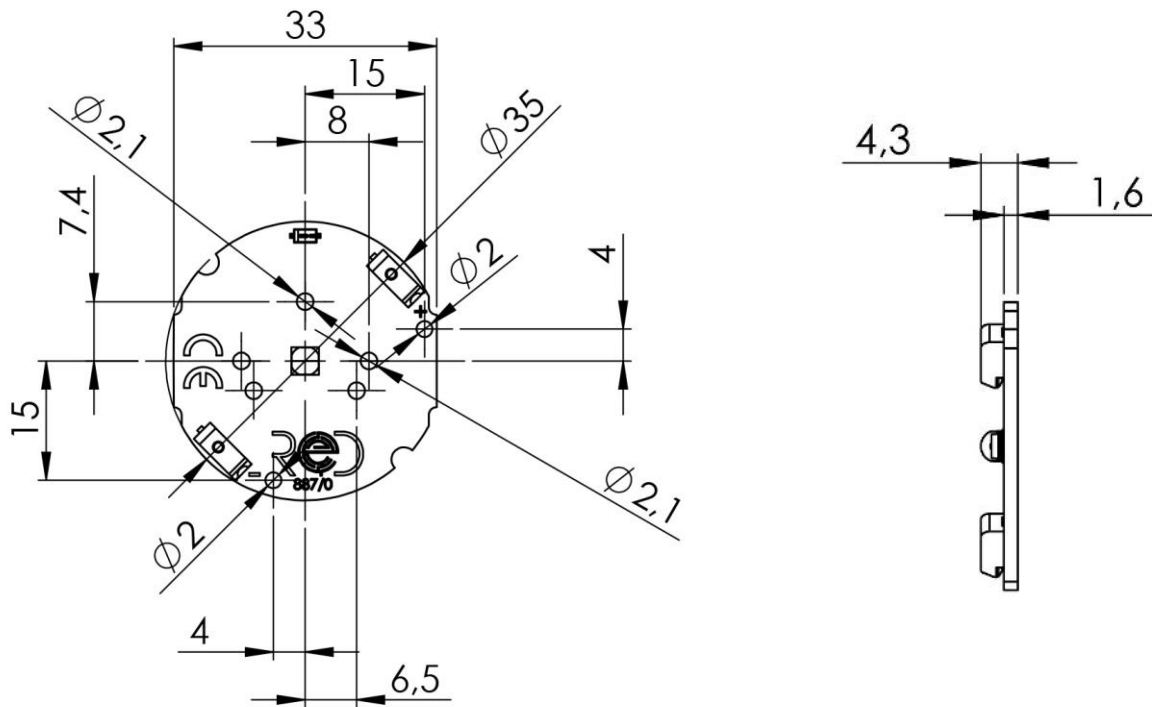

ELECTRICAL CIRCUIT

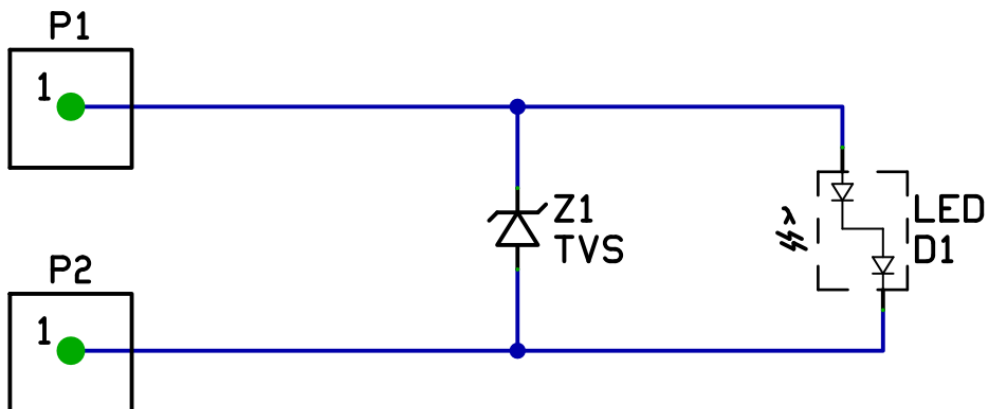

DotMAX

R3887

Accessories: LedLink Optics

5 YEARS WARRANTY



CC CONSTANT CURRENT



Specifications: BLU series Diffusion Sheets DLX	
View Angle (FWHM)	3°/5°/15°/25°/38°/5°x20°/10°x35°
Material	PMMA 8N
Type	TIR
Efficiency	>90%
Operating Temperature	-40°C ~ 170°C
Specifications: AHA series Diffusion Sheets DCK	
View Angle (FWHM)	10°/15°/20°/30°/40°/60°
Material	PMMA 8N
Type	TIR
Efficiency	>90%
Operating Temperature	-40°C ~ 170°C



Specifications: DEZ series	
View Angle (FWHM)	10°x115°
Material	PMMA 8N
Type	Single
Efficiency	> 90%
Operating Temperature	-40°C~ 170°C

ASSEMBLY AND SAFETY INFORMATION

Installation must be carried out under observation of the relevant regulations and standards. The LED modules are designed for operation with a casing or luminaire. Installation must be carried out in a voltage-free state (i.e. disconnected from the mains).

The following advice must be observed; non-observance can result in the destruction of the LED assembly modules, fire and/or other hazards.

- o Consider safety regulations acc. EN 60598 in the luminaire design, especially when the operating LED driver is not galvanically isolated.
 - In mode of operation regard to sufficient isolation.
 - Live parts must not be touched in operation mode. Danger in life!
- o ESD (electrostatic discharge) protection measures must be observed when handling and installing the LED modules. See VS's application notes on ESD protection.
- o Adequate anti-static electricity measures, including the use of conductive shoes, ionizers, work bench grounding, wrist straps, flooring and stools should be used.
- o LED assembly modules must not be subjected to any undue mechanical stress, e.g.:
 - do not treat as bulk cargo
 - avoid shear and compressive forces during handling and installation
 - do not damage circuit paths
 - avoid any pressure on the light emitting surface
- o Safe operation only possible by the use of external constant current sources (max. see table "Electrical Characteristics").
- o Operation only with power supply units that feature the following protection:
 - Short circuit protection
 - Overload protection
 - Overheating protection
- o The module can be fixed with M3 screws. Fixation only with flat or cylinder head screws (M3) (no countersunk screws) Max. torque: 1.2 Nm (M3)
- o Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- o For interconnection the LED modules is equipped with push-in terminals (WAGO 2050).
- o Safety regulations acc. to EN 60598 (or further standards) has to be observed if the maximum output voltage exceed the permitted touchable value.
- o The following points must be observed when connecting LED modules in parallel:
 - All LED strings that are wired in parallel must contain the same number of LEDs (symmetrical loading).
 - Owing to differing forward biases, there can be a difference of up to 10% in brightness between modules connected in parallel.
- o To ensure problem-free operation, the specified maximum temperature at the tip point (see "Operating Life") must be observed (and measured in accordance with EN 60598 1). To satisfy this point, it may be necessary to put measures in place to ensure any heat is dissipated from the PCB to the environment.
- o In the event of outdoor applications or applications in damp locations, care must be taken to protect LED assembly modules against humidity, splashes and jets of water. Any corrosion/damage resulting from humidity or contact with condensation will not be recognized as a defect or manufacturing fault. LED assembly modules are not specially protected against foreign bodies or dust. Depending on the type of application, further protection must be ensured to prevent dust and foreign bodies from entering.
- o Due to the manufacturing process, the PCBs of the LED assembly modules can have sharp edges and corners. Care must therefore be taken during handling and installation to avoid injury.
- o For optimal load of used constant current driver the modules can only be connected in series. The quantity of LED modules is limited by the sum of forward voltage and the capacity of used constant current driver. Safety regulations acc. to EN 60598 has to be observed if the sum of forward voltage exceed the permitted touchable value.
- o Operating LED modules in the presence of certain chemical substances or in chemically enriched (aggressive) environments can impair module functionality or even cause total module failure.
- o The photobiological safety of the LED modules must be classified into risk groups in accordance with "EC / TR 62778: „risk group“ (except: HB, 6500 $K_v > 500 \text{ mA}$: risk group 2)

APPLIED STANDARDS

EC / EN 62031
LED modules for general lighting – Safety specifications

EC / TR 62778
Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires