

DOB III AC Module

D38 120V Series



Application



Down Light



Spot Light



PAR Lamp

Product Description

6W/8W/10W Power Consumption
AC 120V Voltage input
Module Diameter 38mm
LES Diameter 6.3/9.6mm

Features

High color rendering index CRI(Ra)>80/90
Small color tolerance MacAdam < 3
TRIAC dimming compatible
Uniform Full dimming
High Power Factor > 0.9
Low THDi : 30%
Low EMI
RoHS compliant
No photo-biological hazard: RG1

Benefits

Module with integrated electronic
Enables thin designs of luminaries

Table of Contents

General Information.....	3
Absolute Maximum Ratings	4
Optical and Electrical Characteristic (TC=25°C)	5
Chromaticity coordinates(T _c =25°C).....	7
Mechanical Dimensions.....	8
Holder Dimensions.....	9
Characteristic curve.....	10
Reliability.....	14
Product Packaging Information.....	15
Handling with a DOB Series.....	16
Revision History	19
About Edison Opto	19

General Information

Ordering Code Format

5 ELA C N 3T 12 XX XX XX
 X1 X2-X4 X5 X6 X7-X8 X9-X10 X11-X12 X13-X14 X15-X16

X1	X2-X4		X5		X6		X7-X8	
Type	Component		Dimensions		Internal code		Type	
5	Module	ELA	Edilex AC	C	Circle	-	-	3T EMC

X9-X10		X11-X12		X13-X14		X15-X16	
Voltage		Emitter Power		Emitting color		Serial Number	
12	120V	06	6W	27	2700K	-	-
		08	8W	30	3000K	-	-
		10	10W	40	4000K	-	-

Absolute Maximum Ratings

Parameter	Symbol	Value	Units	Condition
Maximum operation voltage	V_{op}	132	V	-
Power Dissipation	P_d	6.6/8.8/11	W	$V_{op}=120V$
Operation ambient temperature	T_{op}	-40~+85	°C	$V_{op}=120V$
Storage temperature	T_{st}	-40~+100	°C	-
Case Temperature	T_C	85	°C	$V_{op}=120V$
Insulation voltage	Viso[RMS]	1.5	KV	-
Tolerance of Surge	V_s	1.0	KV	$V_{op}=120V$

Optical and Electrical Characteristic (TC=25°C)

Order Code	CCT (K)	Luminous Flux(lm) T _c =25°C		Efficacy (lm/W)	CRI Ra	LES (mm)	Vac	Watt
		Min.	Typ.	Typ.	Min.	Typ.	Typ.	
5ELACN3T12062701	2700	510	570	95	80	6.3	120	6
5ELACN3T12063001	3000	525	580	97				
5ELACN3T12064001	4000	580	650	108				
5ELACN3T12062702	2700	435	485	81	90			
5ELACN3T12063002	3000	445	495	83				
5ELACN3T12064002	4000	495	550	92				

Order Code	CCT (K)	Luminous Flux(lm) T _c =25°C		Efficacy (lm/W)	CRI Ra	LES (mm)	Vac	Watt
		Min.	Typ.	Typ.	Min.	Typ.	Typ.	
5ELACN3T12082701	2700	650	725	91	80	6.3	120	8
5ELACN3T12083001	3000	670	740	93				
5ELACN3T12084001	4000	740	820	103				
5ELACN3T12082702	2700	555	620	77	90			
5ELACN3T12083002	3000	570	630	79				
5ELACN3T12084002	4000	630	700	87				

Order Code	CCT (K)	Luminous Flux(lm) T _c =25°C		Efficacy (lm/W)	CRI Ra	LES (mm)	Vac	Watt
		Min.	Typ.	Typ.	Min.	Typ.	Typ.	
5ELACN3T12102701	2700	980	1090	109	80	9.6	120	10
5ELACN3T12103001	3000	1010	1120	112				
5ELACN3T12104001	4000	1115	1240	124				
5ELACN3T12102702	2700	835	930	93	90			
5ELACN3T12103002	3000	860	950	95				
5ELACN3T12104002	4000	950	1055	105				


Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Viewing Angle FWHM	2 θ 1/2		120		deg	V _{op} =120V
Operation Voltage	V _{op}	108	120	132	V	-
Power Dissipation	P _d	5.4	6	6.6	W	V _{op} =120V
		7.2	8	8.8		
		9	10	11		
Operation Frequency	F _{op}	50/60			H _z	V _{op} =120V
Power Factor	PF	0.9			-	V _{op} =120V
Current THD	ATHD		30		%	V _{op} =120V

Notes:

1. At 120Vac, Ta=25°C.
2. Edison Opto Corp. maintains luminous flux $\pm 10\%$, Ra ± 2 tolerance.

Chromaticity coordinates($T_c=25^\circ\text{C}$)

CIE Chromaticity Diagram

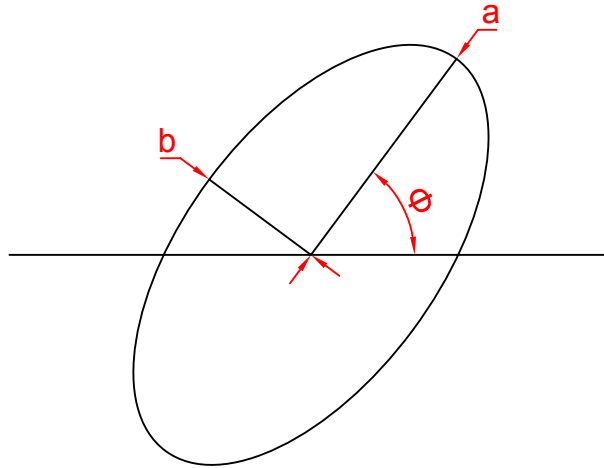

The color ranks have chromaticity ranges within 3-step MacAdam ellipse


CCT	Steps	C _x	C _y	a	b	theta
2700K	3	0.4620	0.4145	0.00810	0.00420	53.42
3000K	3	0.4383	0.4081	0.00834	0.00408	53.13
4000K	3	0.3875	0.3868	0.00939	0.00402	53.43

*Tolerance of measurements of the chromaticity Coordinate is ± 0.005


Mechanical Dimensions

Emitter Dimensions

6W/8W

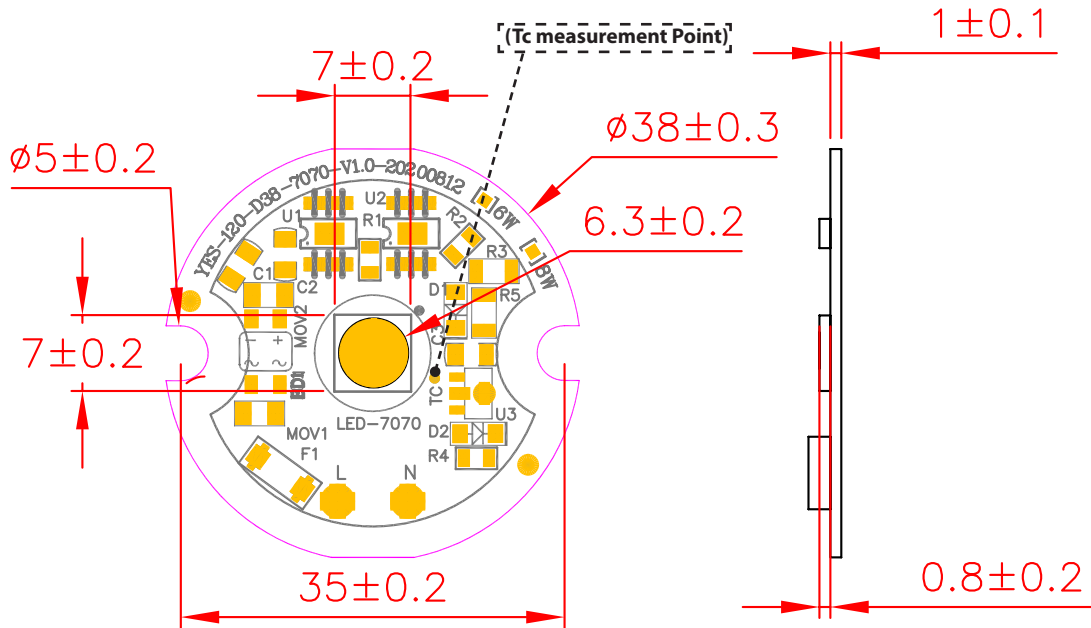

10W

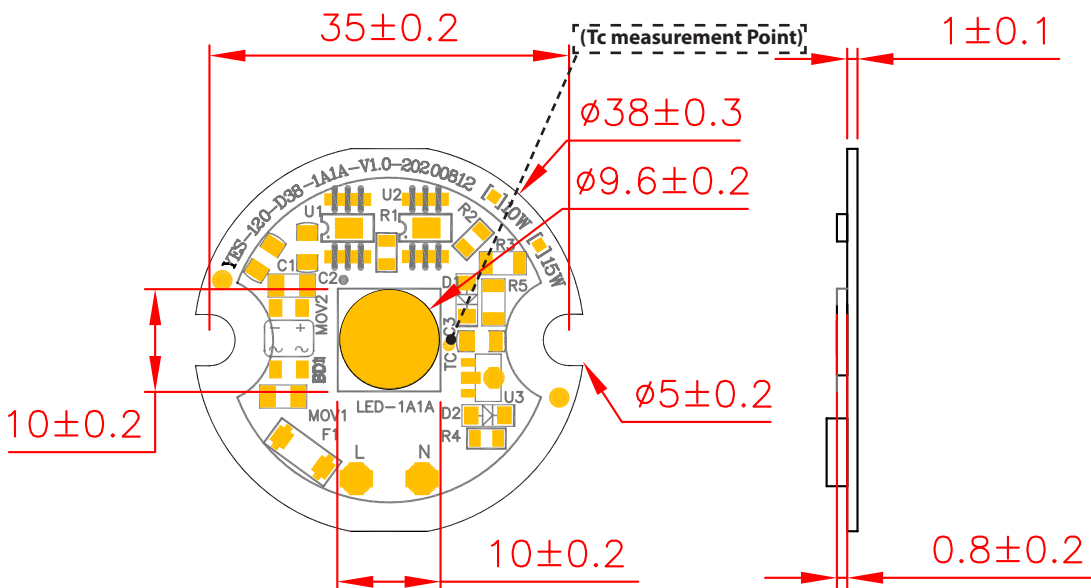

Note:
Unit: mm

Holder Dimensions


Product description

1. Material : PC
2. Color : White/Black
3. Flame retardant rating : V0


Application Note

1. Operating temperature : $-40^{\circ}\text{C} \sim 120^{\circ}\text{C}$
2. Apply on DOB D38 Series
3. M3 screws with flat head , max. head diameter should be no more than 6mm


D38-White



D38-Black



Product Dimensions

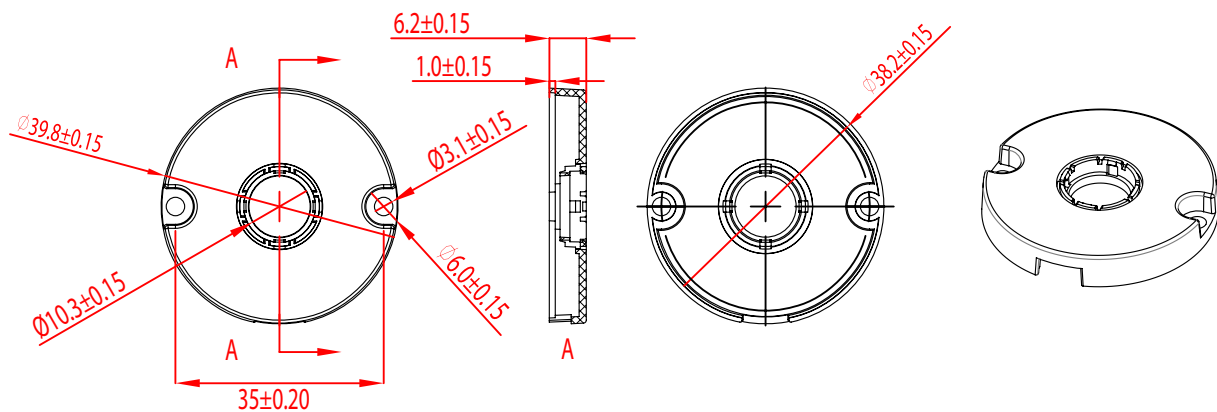


Ordering Data


Part No	Color	Packaging Bag	Weight per pc.
13CRDAA00114	white	2,000 pcs	0.002 kg
13CRDAA00117	black	2,000 pcs	0.002 kg

Characteristic curve


Color Spectrum (Tc=25°C,VAC=120V)_Ra 80

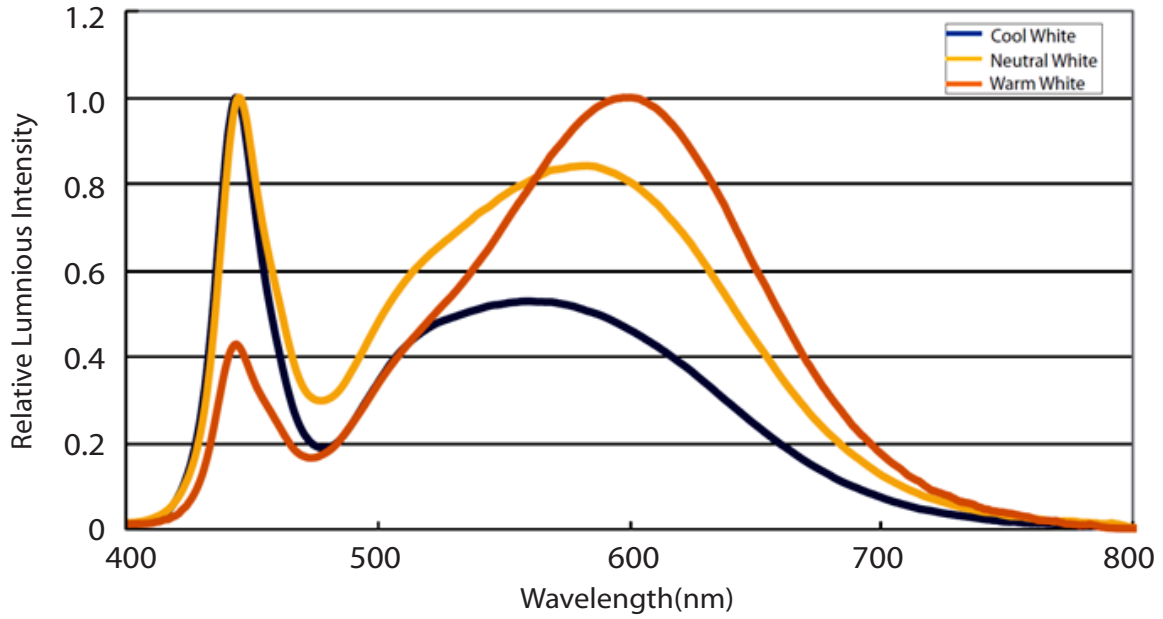


Color Spectrum (Tc=25°C,VAC=120V)_Ra 90

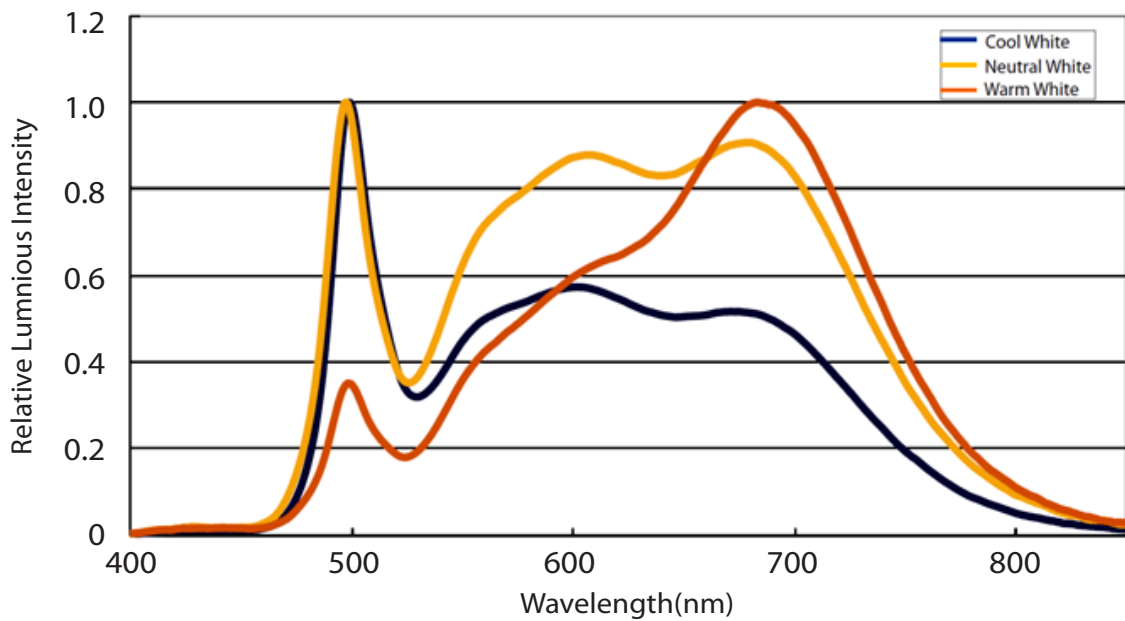


Beam Pattern

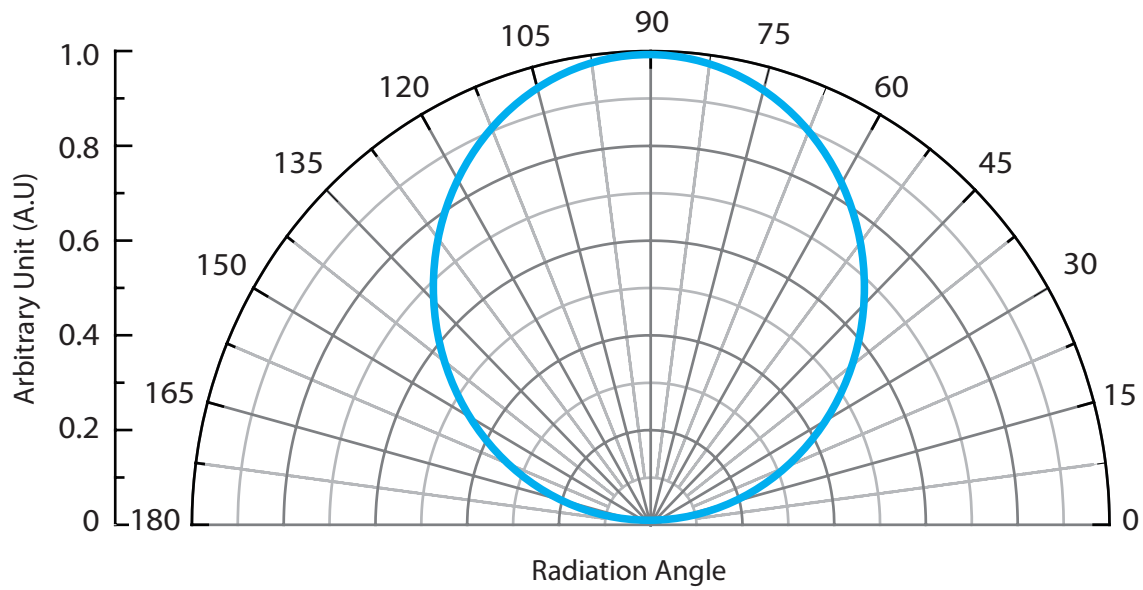


Relative luminous Intensity vs. Voltage (Tc=25°C)

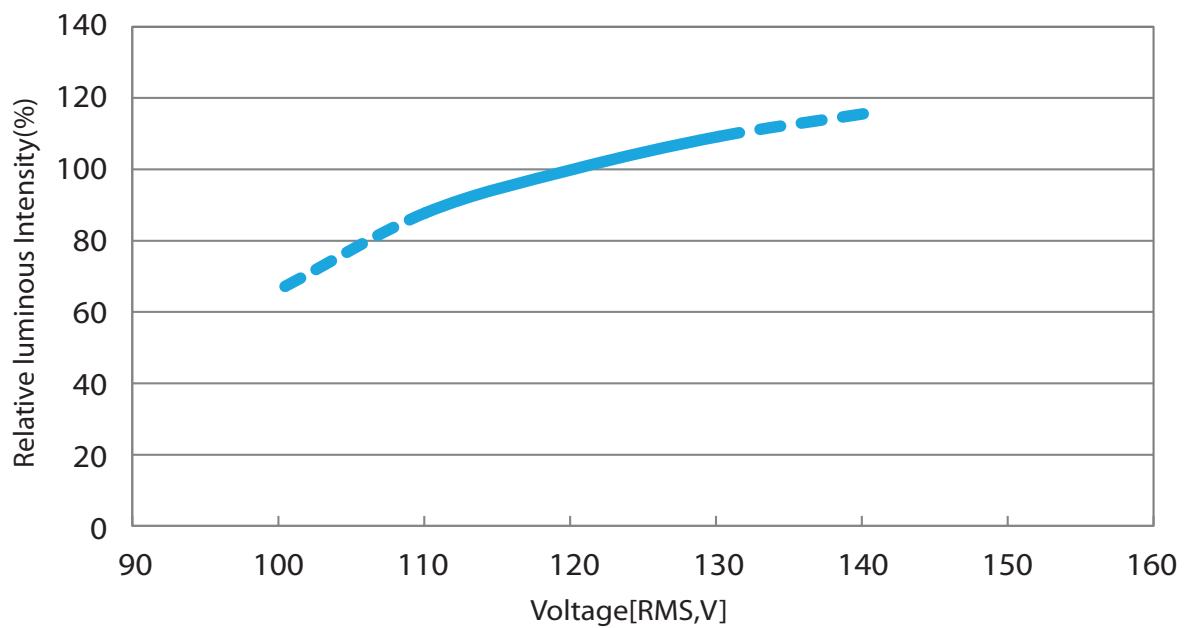


Relative Wattage vs. Voltage (Tc=25°C)

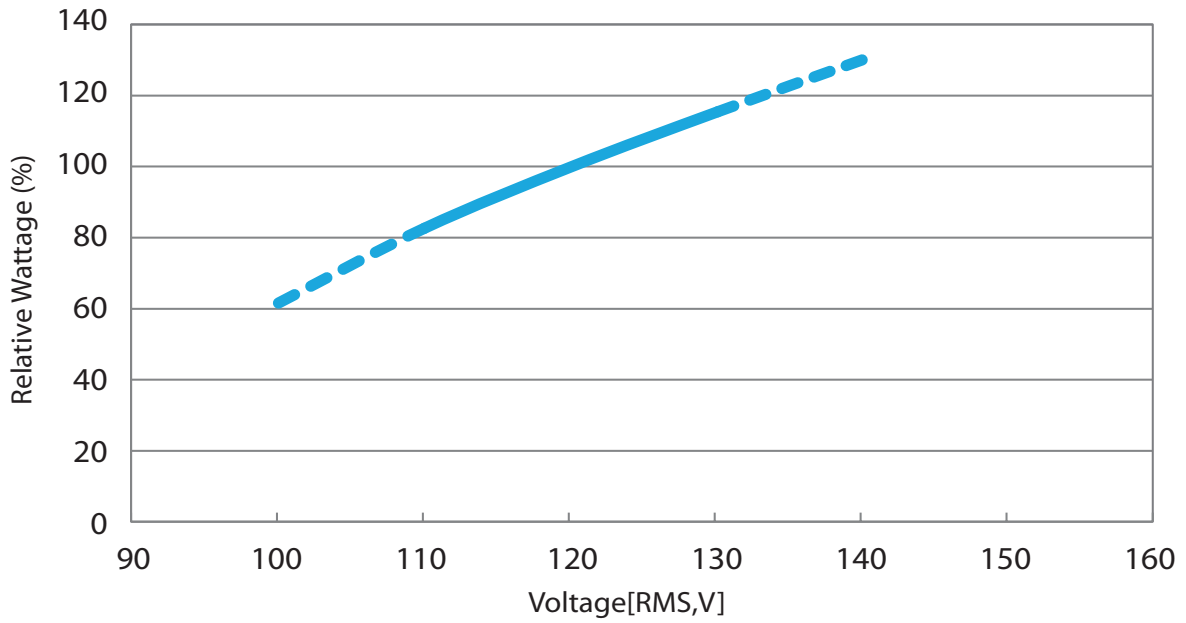

Relative Luminous Intensity vs. Case Temperature (VAC=120V)

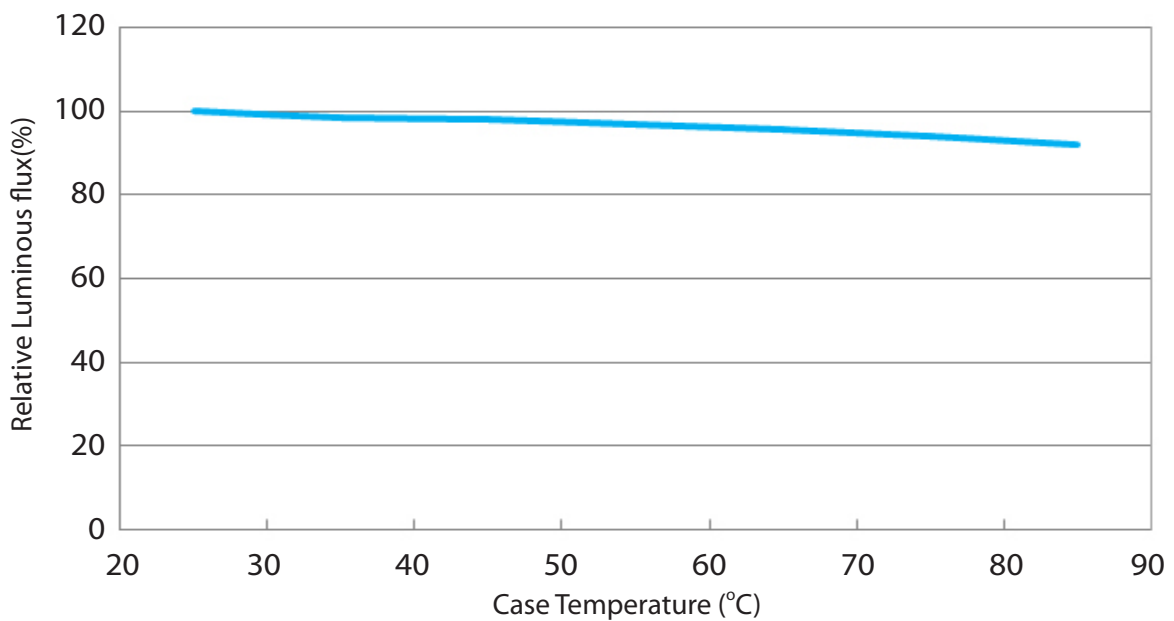

Relative Wattage vs. Case Temperature (VAC=120V)

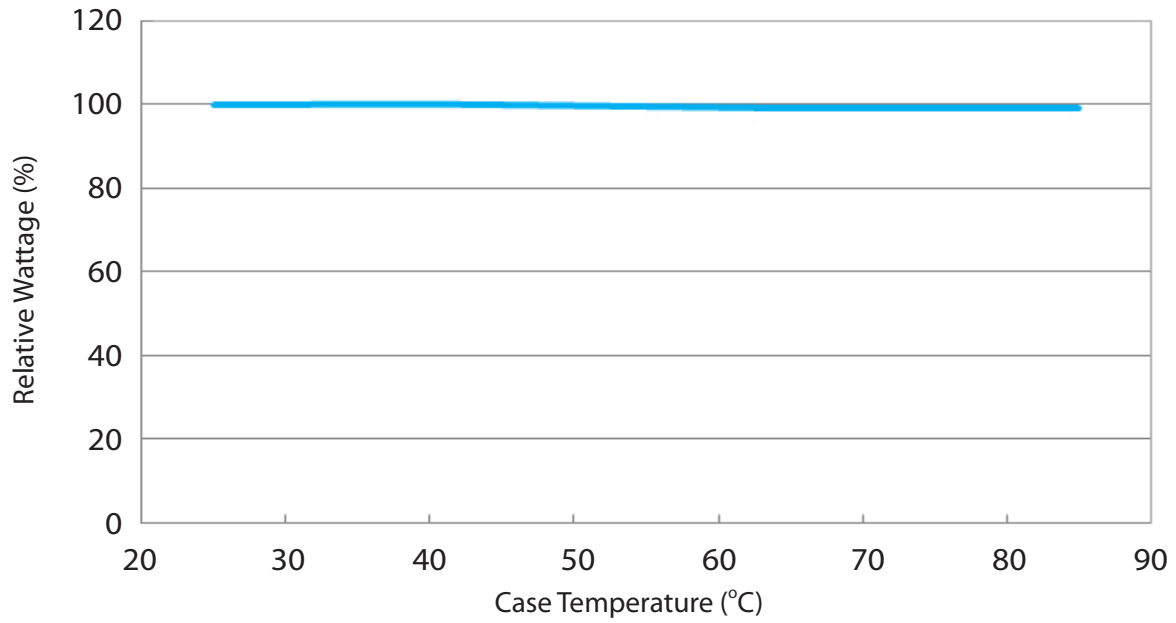

Reliability

NO .	Test Item	Test Condition	Remark
1	Temperature Cycle	-40°C~100°C (30 mins / 30 mins)	100 Cycle
2	Operation Life test	Ta = 25°C	1000 hrs
3	ON/OFF Test	3 sec ON, 3 sec OFF	15K times


Failure Criteria

Item	Criteria for Judgment	
	Min.	Max.
Luminous Flux	0.85	-
$\Delta u'v'$	-	0.006
Resistance to Soldering Heat	No dead lamps or visual damage	


Cautions






LED avoids being stored and lighted in the environment containing sulfur. Some materials, such as seals, printing ink, enclosure and adhesives, may contain sulfur, avoiding the exposure in acid or halogen environment.

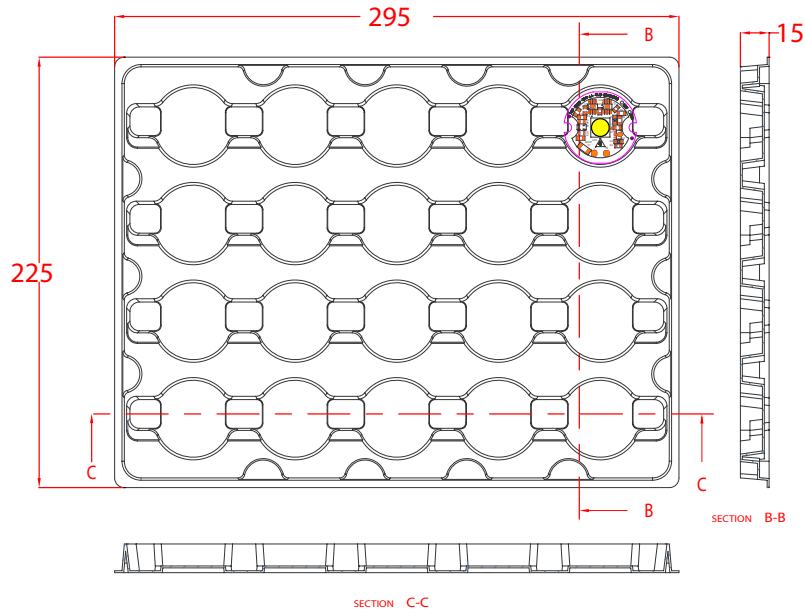Product Packaging Information

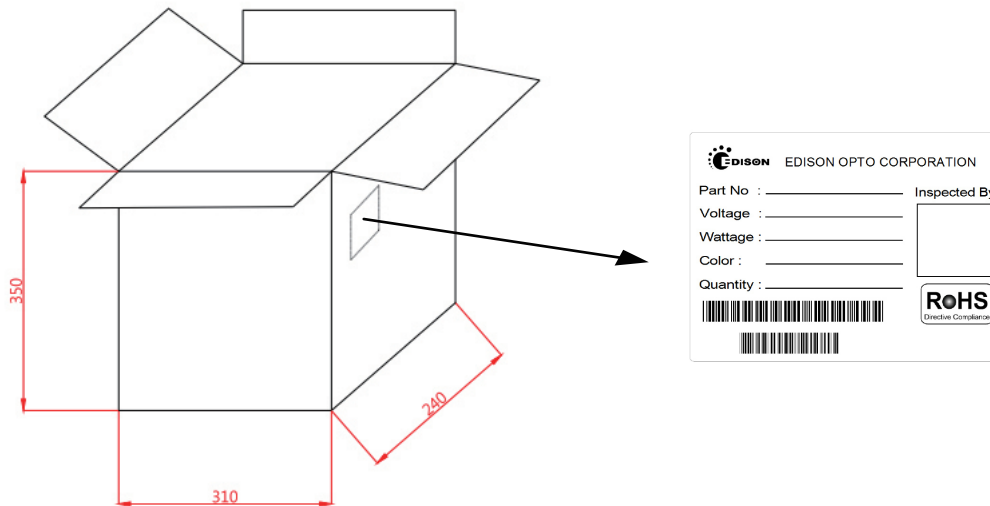

Tray : 295x225x15 mm ,20pcs Module In the Tray



 EDISON OPTO CORPORATION	
Part No : _____	Inspected By: _____
Voltage : _____	
Wattage : _____	
Color : _____	
Quantity : _____	
 	
 <small>RoHS Directive Compliance</small>	

33 Tray in the outer box, 660 pcs Module in the outer box

Part No.	Number of module / Tray	Number of module / Box	Weight
5ELACN3T1206xxxx 5ELACN3T1208xxxx 5ELACN3T1210xxxx	20pcs	660pcs	5.7KG


Handling with a DOB Series

√ Both the light emitting area and white dam over the light emitting area is composed of resin materials. Please avoid the resin area from being pressed, stressed, rubbed, come into contact with sharp metal nail because the function, performance and reliability of this product are negatively impacted.

√ LED device are combine by many accurate parts which belong to static sensitive device. A human body may aware of the discharge voltage about 2-3KV, which is much larger than an electronic device may bear. Therefore, to keep the LED operation environment away from static and lower the exits static become an important issue in a LED manufacture.

1. Anti-Static Steps - All the staffs who has the possibility to contact with the LED components should follow the instructions to eliminate the static:

- Put on the hand or finger gloves before touch a LED device. (Do not use a nylon or rubber Glove)
- Do not do any actions that may generate the static in the protection area. Such as wipe hands or foot, put on/off the clothes.
- Avoid any movement that may cause static damages. When remove a component from the package, please be slow and gentle.
- Do not touch the metal part of a LED component.

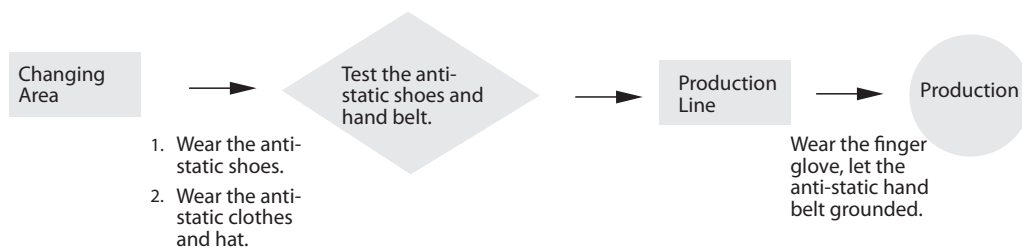

2. Environmental anti-static protection

- Use an anti-static floor and make earth. Materials such as plastic or rubber contain carbon or conductive polyester is recommended.
- LEDs should be operated on the desk which is laid by the static discharge material.
- Protection area with a temperature at $22\pm 5^{\circ}\text{C}$ and a relative humidity at $70\pm 10\% \text{RH}$ are recommended.
- Layout an appropriate earth system. All the equipment should earth isolated into the ground or pillar.
- All soldering and testing equipment should also provide earth ability.
- Prevent the accumulation and the fractions between stuffs.

3. Anti-Static steps for package, transportation and storage.
 - Package: All the bags must have the ability of anti-static. Do not use any nylon bag, normal plastic bag or polyester bag for package. Do not open the bag if a LED is not ready to be handling. Open the bag at the protection area and put in a conductive case.
 - Transportation: The cart should install the conductive wheels. Avoid the mechanical vibration and impacts.
 - Storage: Be attention of the temperature and the relative humidity under the suggest condition.

√ Thermal Management


About 80% of input power of a LED transform into heat. A high temperature operation condition always easily causes the LEDs to decrease of flux and the life decay of LED dies. The highest operation temperature of a component is able to be found in its datasheet which is indicated as T_j .

The power dissipation ability, the ambient temperature between the LED junction, environment, thermal path and its thermal resistance are the mean parameters which affect the performance of a LED device. Therefore, the limitation of the junction temperature has become an important issue when designing a LED product.

For LEDs, choose an appropriate operation environment and conduct the heat to the air after light on LEDs may maintain the better performance and lifetime. Four major thermal path are :

- (1) From heat source (component) to heat sink. (By conduction)
- (2) Conduction from within the heat sink to its surface. (By conduction)
- (3) Transfer from the surface to the surrounding air. (By convection)
- (4) Emit heat from the heat sink surface. (By Radiation)

Path(1): The contact surface of the component and heat sink are not perfectly flat, they are not able to meet each other completely. Air between these two materials will result high thermal resistance and reduce the effect of heat transfer. To enhance the ability of thermal conduction, one common method is applying thermal grease between the two interfaces and use the screws to enforce the adhesion between two surface.

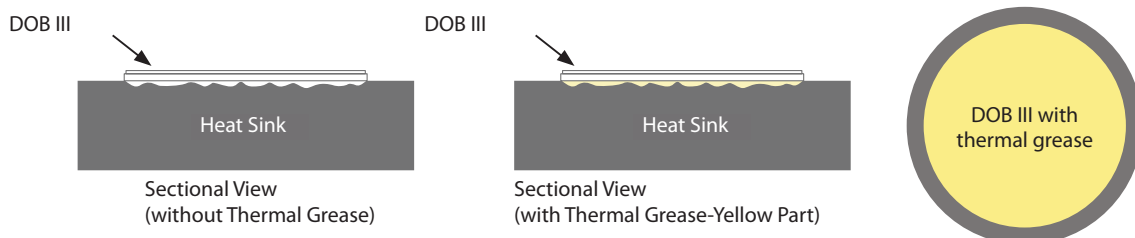

Recommended thermal Grease Parameters

Characteristics	Value	Unit
Thermal Conductivity (K)	>3.0	W/m*K
Thickness	≤0.1	mm

- √ DO NOT touch any of the circuit board, components or terminals with body or metal while circuit is active.
- √ DO NOT add or change wires while circuit is active.
- √ DO NOT make any modification on module.
- √ DO NOT use together with the materials containing sulfur.
- √ DO NOT exceed the values given in this specification
- √ Keep cautions not to apply higher voltage above the maximum rating. Otherwise damage may occur.
Pay attention not to exceed the maximum operation temperature of the Tc Point when the modules are used in an enclosed environment.
- √ DO NOT use adhesives to attach the LED that outgas organic vapor.
- √ DO NOT directly make the HI-POT test over 750V on the module.
- √ DO NOT separately connection L and N terminal when the power source turn on
- √ DO NOT wear any conductive accessories (such as jewelry) which could accidentally get an electric shock.
- √ DO NOT press the product; even a slight pressure may damage the product. The environments such as high temperatures, high humidity or direct expose to sunlight should be avoided since the product is sensitive to these conditions
- √ DOB AC Module uses integrated circuit (IC) which can be damaged when exposed to static electricity. Please operate with antistatic device. Do not touch the product unless ESD protection is used. DOB AC Module can't be installed in end product unless the ESD protection is used
- √ DO NOT assemble in conditions of high moisture and/or oxidizing gas such as Cl, H₂S, NH₃, SO₂, NO_x, etc. Damage by corrosion will not be allowed as defect claim.
- √ LED Module is recommended for Indoor use only. Longtime exposure to sunlight or UV can cause the lens to discolor.
- √ Please note that BOB AC Module products are driven by high voltage, therefore when operating DOB AC Modules should be very cautious
- √ Faults, lightning, or fast switch may cause voltage surge which surpasses the normal value
- √ The failure of internal component may cause excessive voltages
- √ Storage Precautions:
 - (1) The devices should be stored in the anti-static bag.
 - (2) If the anti-static bag has been opened, please make sure to reseal the bag to avoid air and moisture infiltrate in the bag.

Revision History

Versions	Description	Release Date
1	Establish a Datasheet	2020/11/16
2	Revise General Information Revise Absolute Maximum Revise Optical and Electrical Characteristic Revise Chromaticity Coordinates Revise Mechanical Dimensions Add Holder Dimensions Add Product Packaging Information	2021/06/23

About Edison Opto

Edison Opto is a leading manufacturer of high power LED and a solution provider experienced in LDMS. LDMS is an integrated program derived from the four essential technologies in LED lighting applications- Thermal Management, Electrical Scheme, Mechanical Refinement, Optical Optimization, to provide customer with various LED components and modules. More Information about the company and our products can be found at www.edison-opto.com

Copyright©2021 Edison Opto. All rights reserved. No part of publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photo copy, recording or any other information storage and retrieval system, without prior permission in writing from the publisher. The information in this publication are subject to change without notice.

www.edison-opto.com

For general assistance please contact:
service@edison-opto.com.tw

For technical assistance please contact:
LED.Detective@edison-opto.com.tw