




Product Specification

COB LED Flexible Strip

LCECOB-CV24300-Wxx-P10-free cut led strip




COB LED strip is designed for spots-free led linear lighting, suitable with any kinds of led profile and silicon tube.

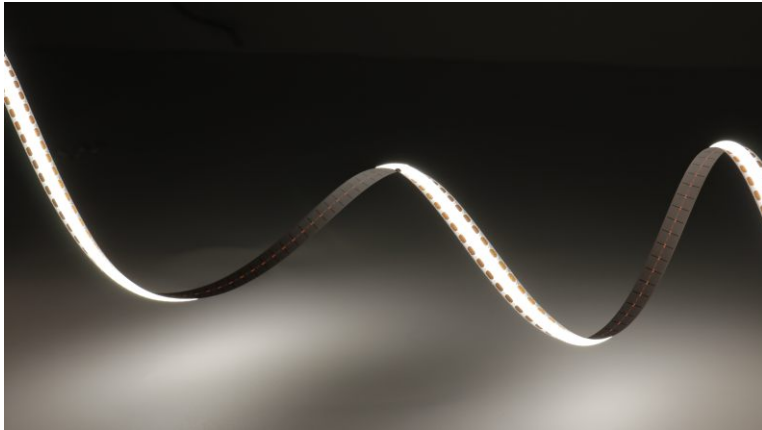

Feature


1. Dots-free with uniform lighting
2. Efficacy Lumen upto 120lm/watt
3. Cuttable and solderless connection with crystal connector



Light Source

wire inside chips	99.99% purity golden (1.0um or above diamant)
chip size	big size chip with high output lumen
phosphor powder	Mitsubishi or Intermatix phosphor powder
chip brand	Epistar or brand chip
LED lead frame	100% purity copper LED lead frame
PCB	35U cooper PCB/ double side PCB/ back side of PCB is protection layer
Bin code	one order, one small BIN Code only, and LCE can promise you sereral orders from same one Bin
3M tape	300P genuine 3M tape /3M VHB tape
age testing	LCE strip take at least 8hours aging-test
QC Checking	3 times QC checking(SMT + PCB jointing+ after aging testing) before packing

Technical Drawing

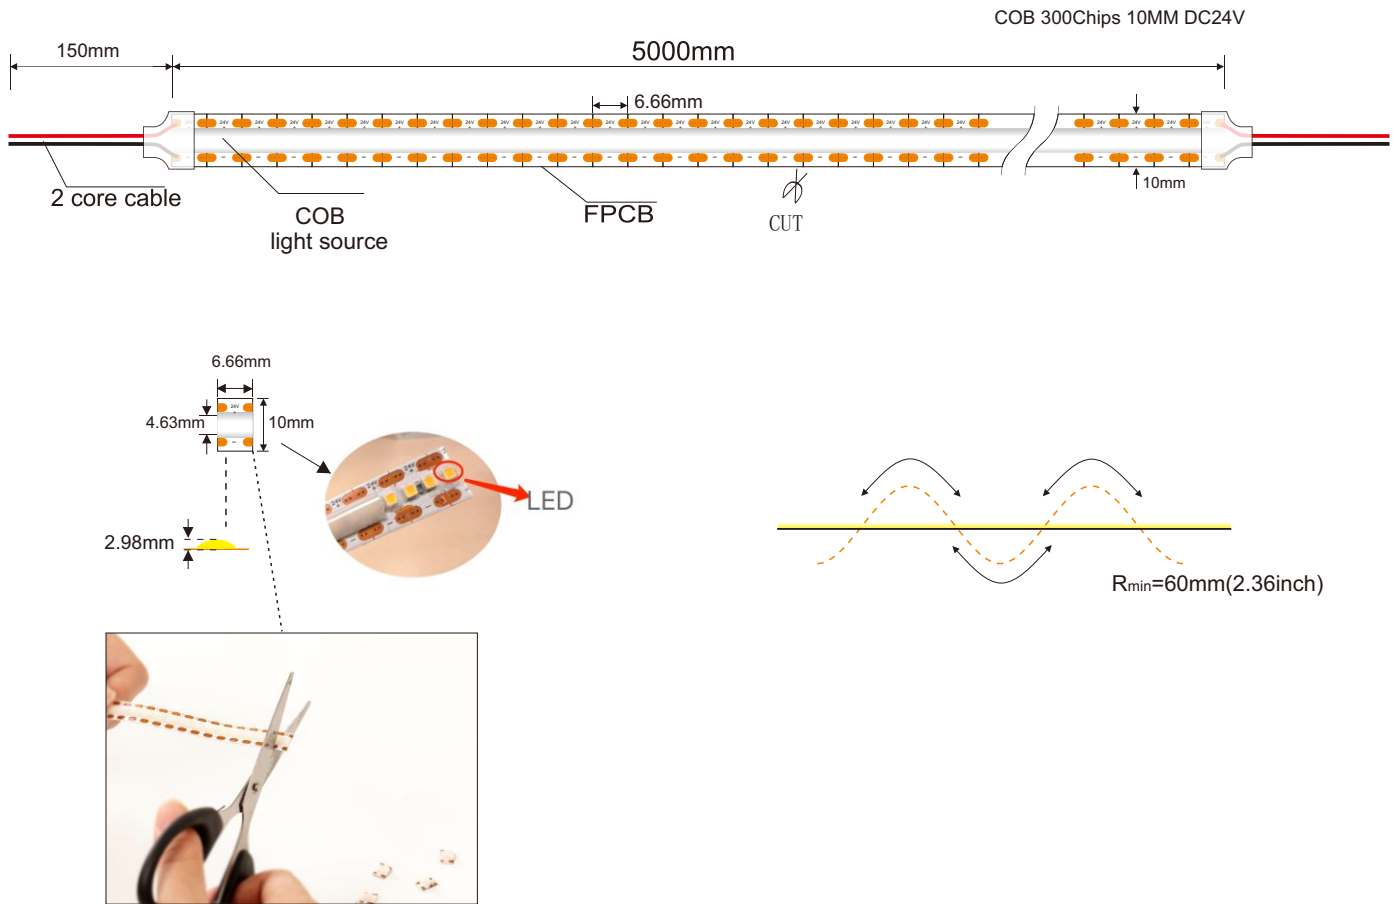

Basic Parameter


P/N	LED QTY (PCS/M)	Voltage	Power W/m	PCB size (mm)	Color	Lumen lm/w	Lumen CRI>90
LCECOB-CV24300-Wxx-P10	300	CV24V	Max 15W	10mm	2700K	110	1650LM
					3000K	112	1680LM
					4000K	124.7	1871LM
					6000K	125	1875LM

Note: All above parameters were given based on naked strip without additional heat sink or housing.
Customized size or customized color temperature, pls contact us further.

Product Parameters

Spectroscopic standard


Ensure customers to get the same bin for different orders by using CIE(X,Y) coordinate spectrometer

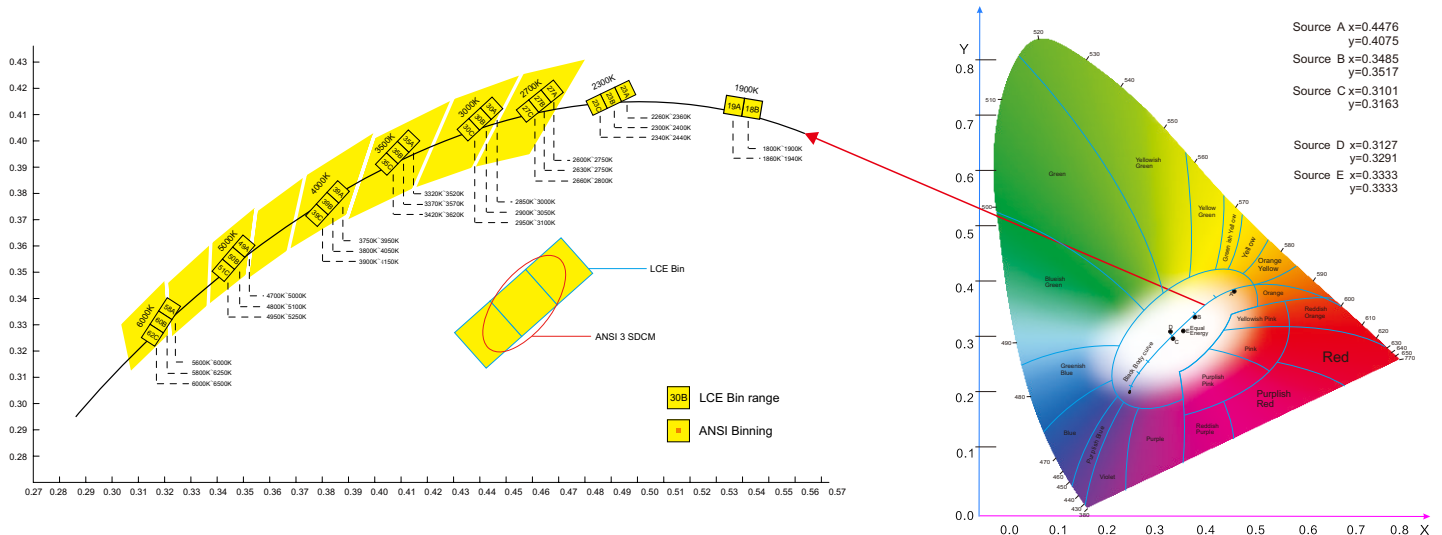


Product Specification

Item:	WCOB led strip	Driver:	External led driver
Qty Chips:	300chips/m	Mains voltage (V):	CV24V
Color:	White	Control gear type:	CONSTANT VOLTAGE DRIVER
PCB width:	10mm	Ref:	LCE
Light controller type:	0-10V/1-10V/DMX/DALI/Triac	Emergency availability:	/
Light Decay:	2% @ 6000Hours	Chip:	Epistar or other brand chips
Operating Temperature:	-25~45 degree	Light emission:	180°
Lifetime	(Lm80) 50000 HRS @45degree	Deviation (SDCM)	3step MacAdam ellipse
Mounting	3M adhesive tape	BIN:	ONE BIN Only
Max running length:	10meter (two side feed)	Warranty:	5 years
Luminaire in:	CLASS II/III		

Light Distribution Curve [Unit:cd]

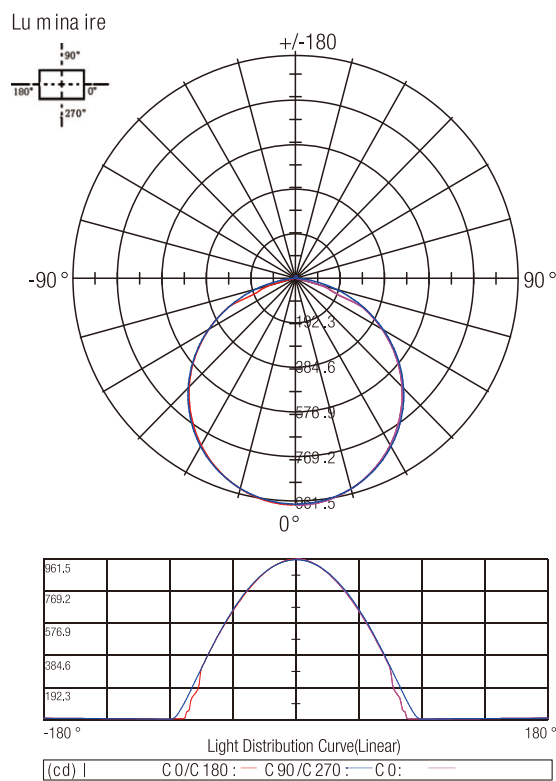


Lux-Distance Curve

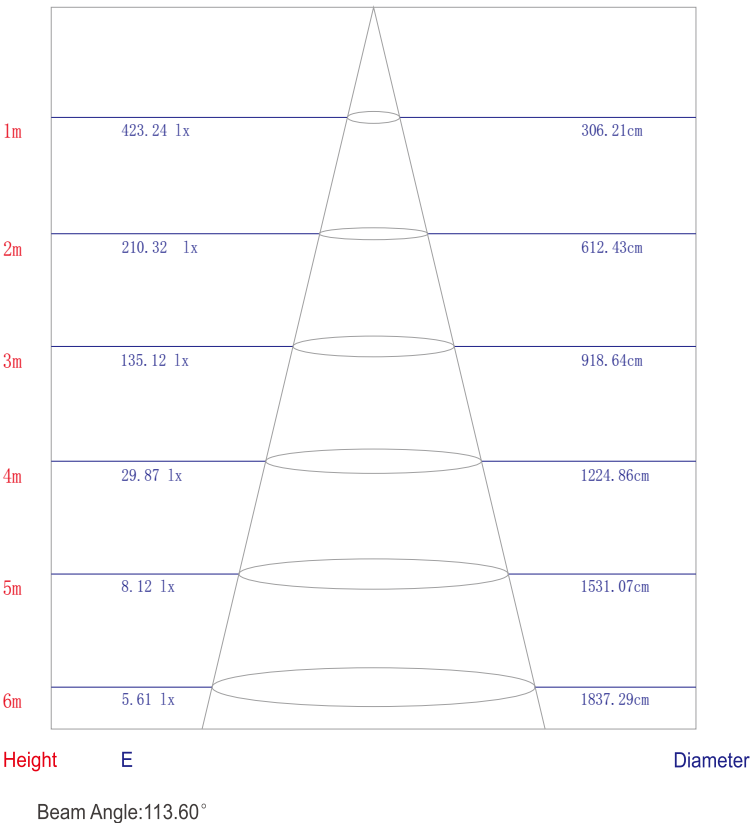


Colour Rendering Index

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97	99	97	95	94	96	93	86	65	94	98	65	99	98	92


LED Strip Solution

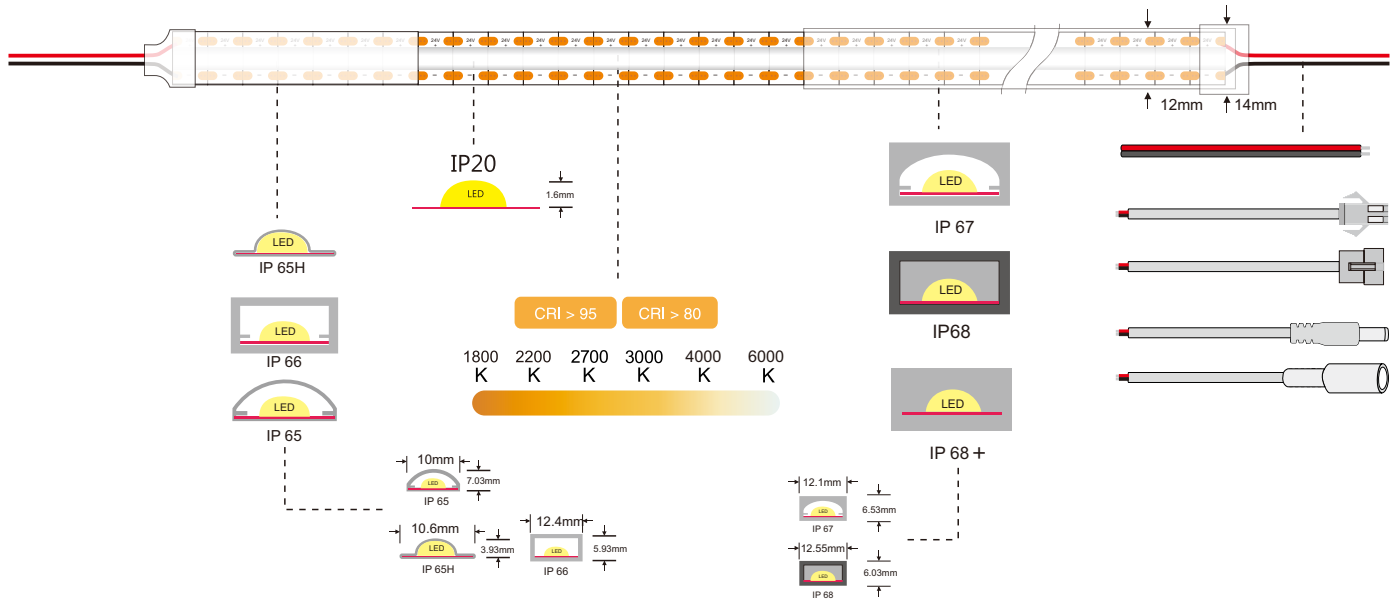



One end feed

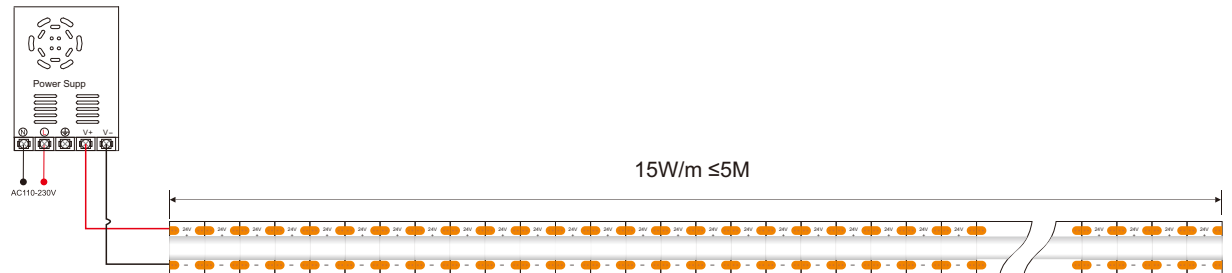

Two ends feed

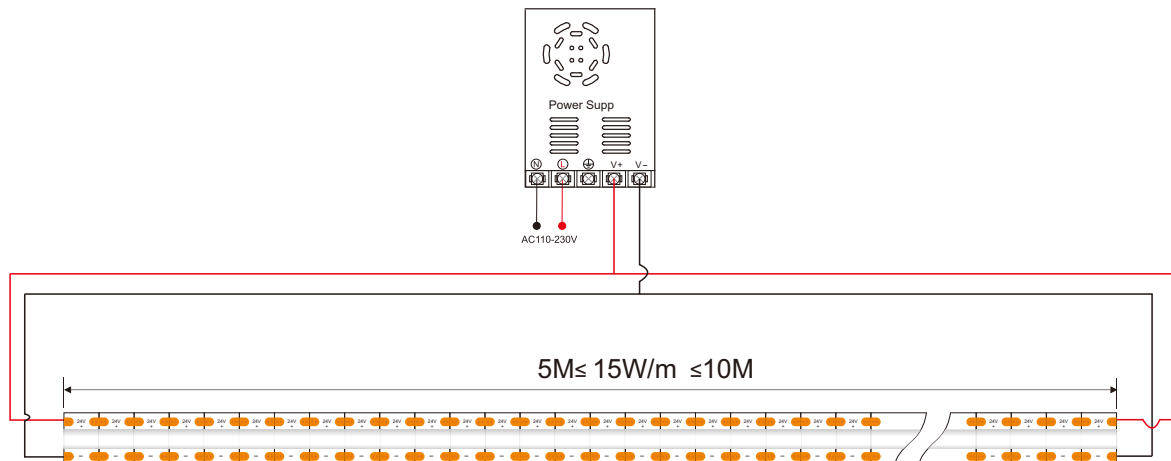


IP Level Diagram

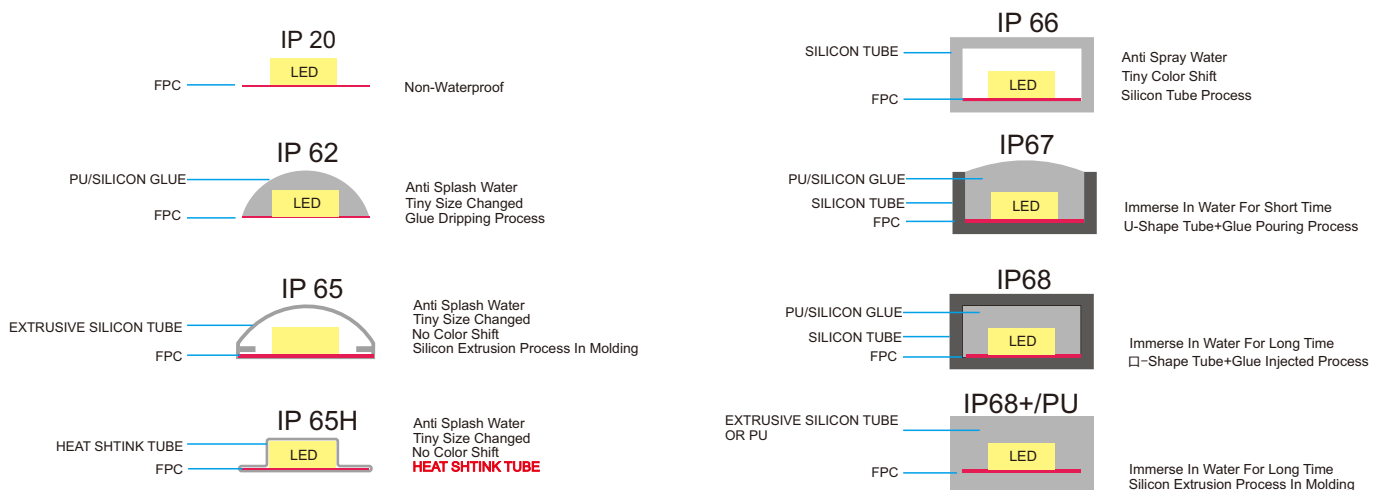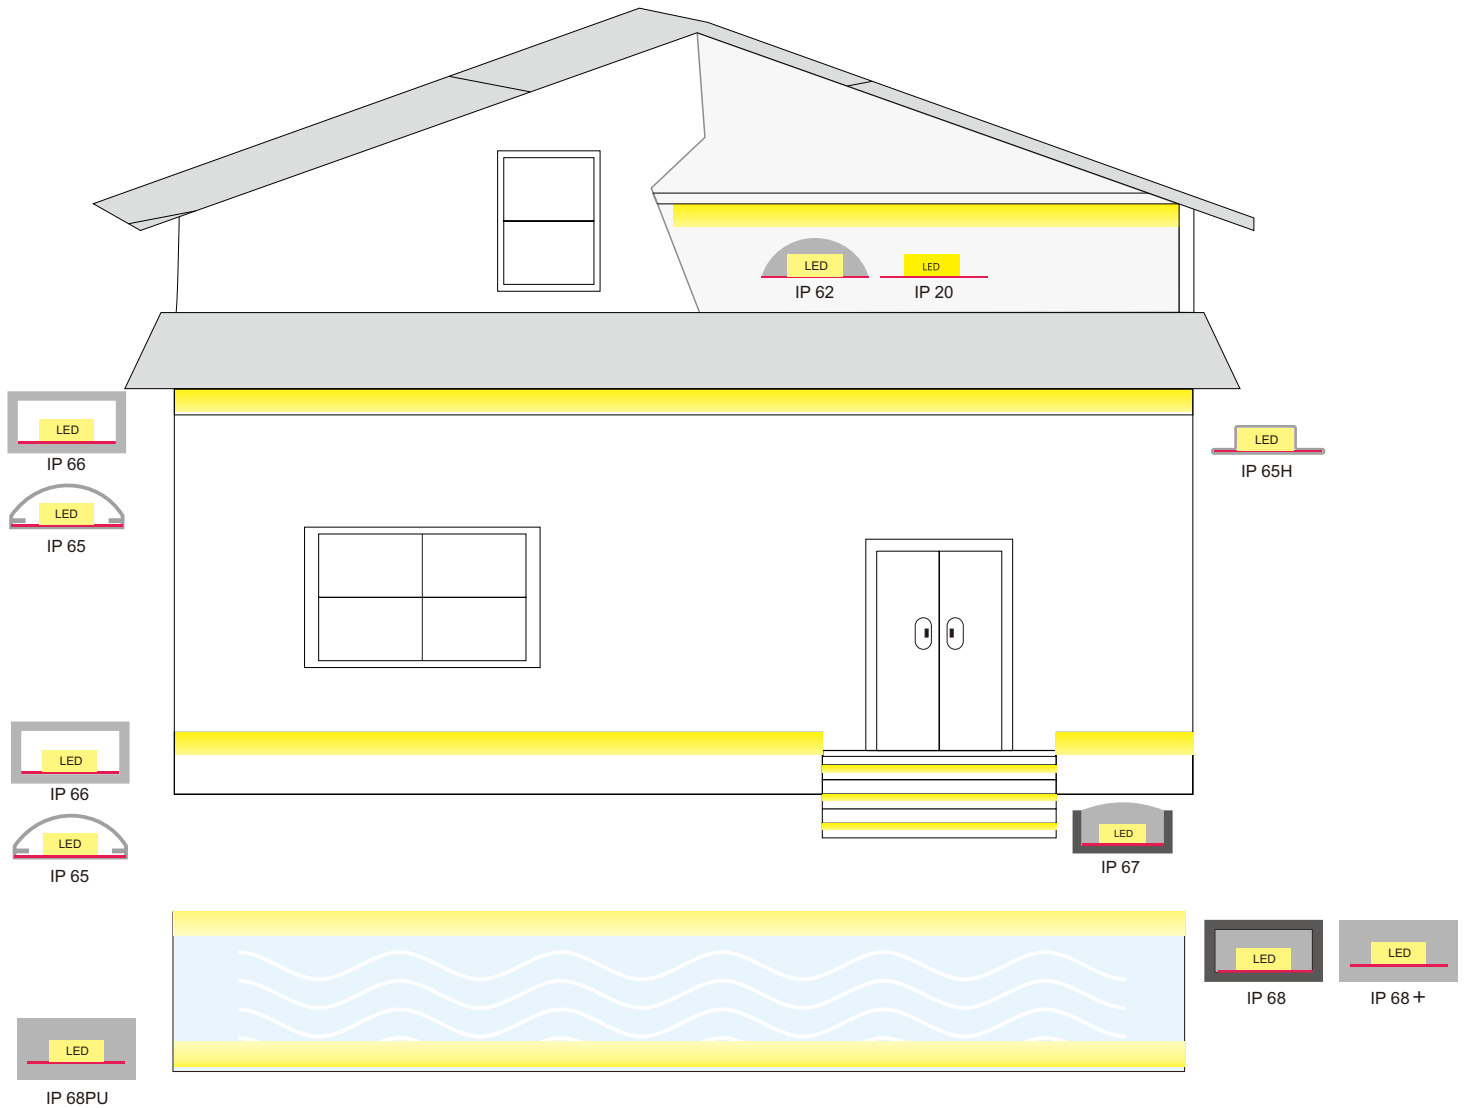


Installation Diagram:


1. Regular connection

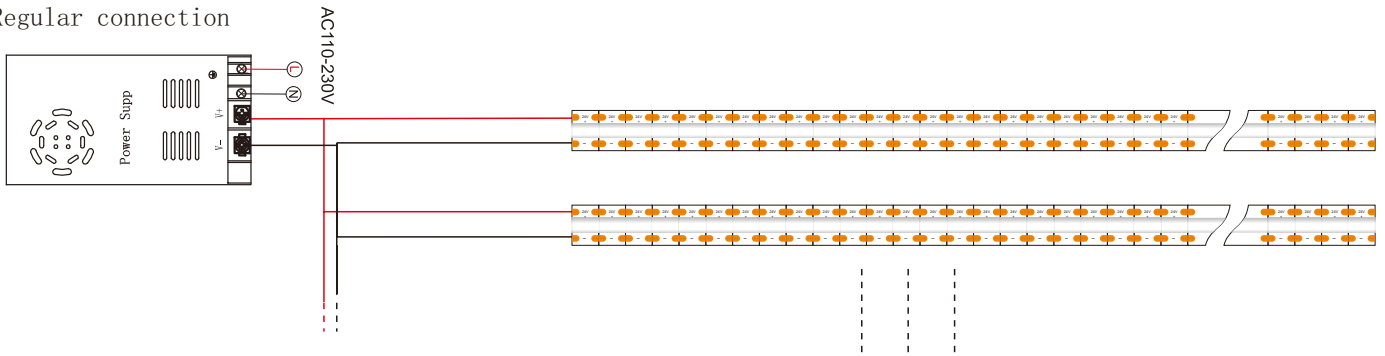


2. connection with dimmer

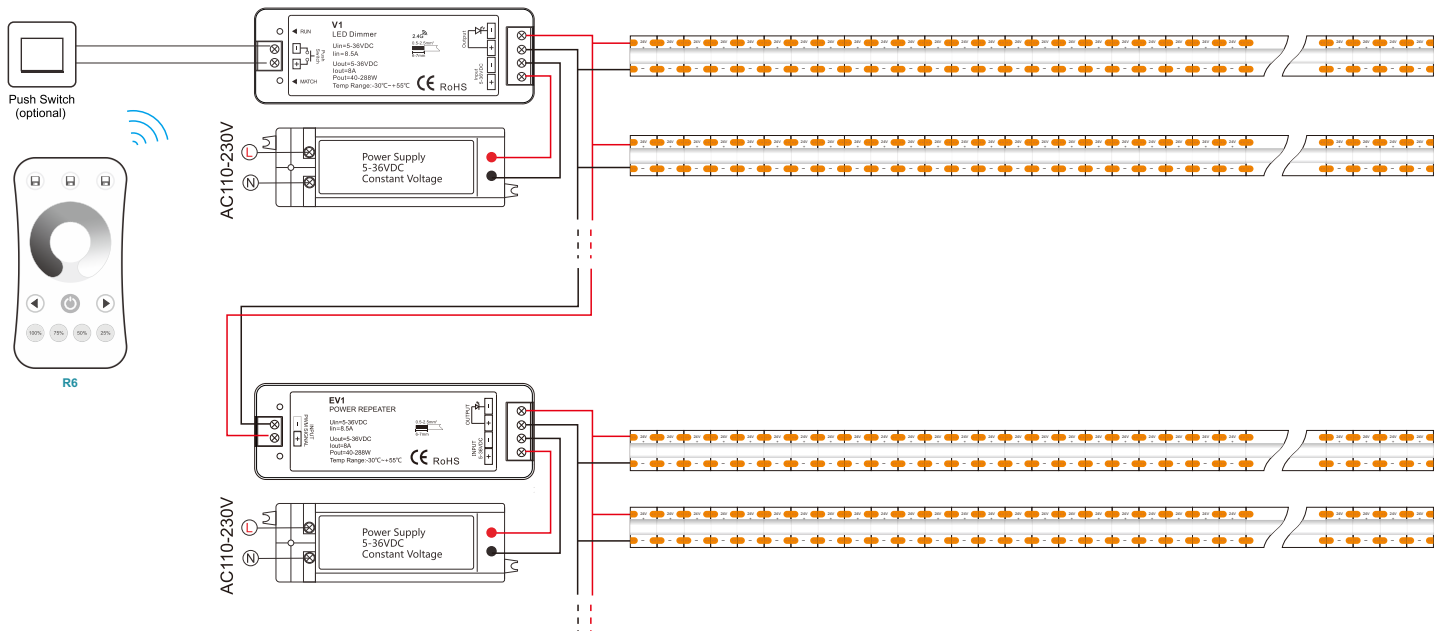


3. DMX Connection

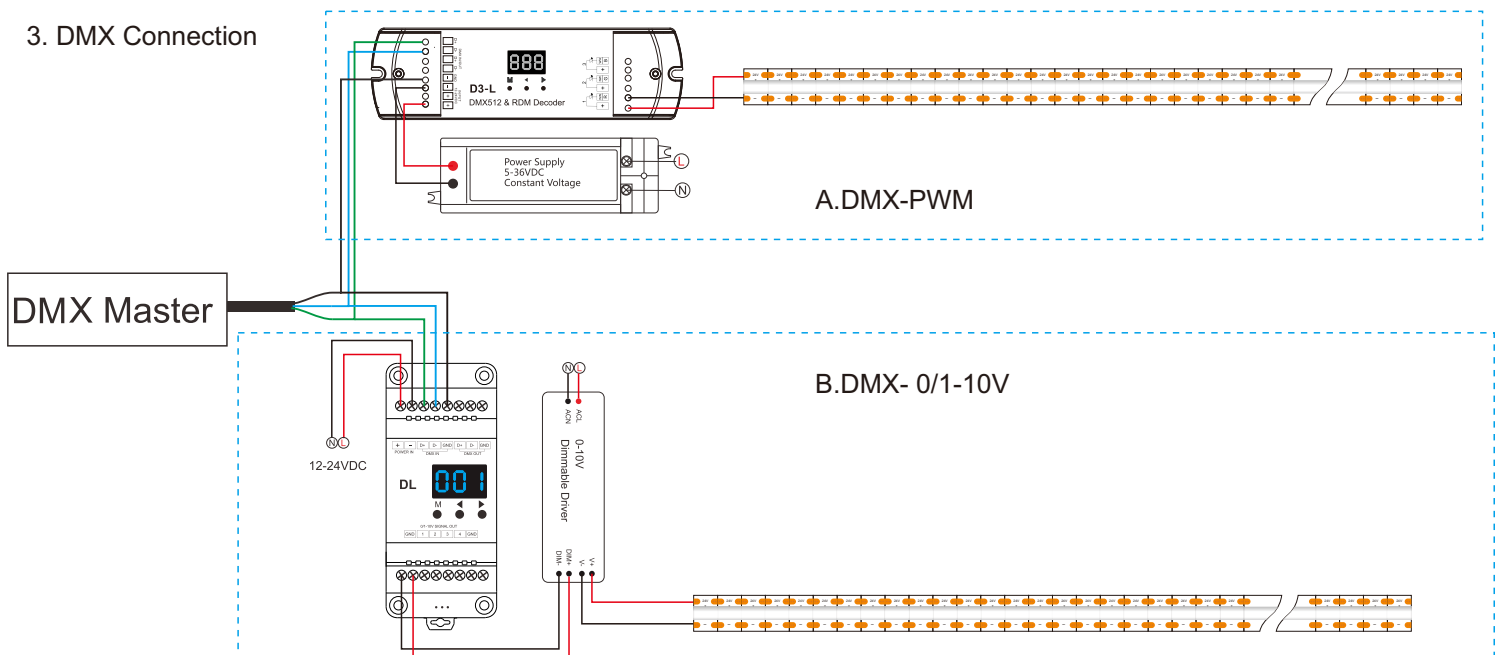


Installation




1. Cut in specific location




2. Put the PCB in the space between clip and connector, make the clips exactly aim at welding point




3. Close the cover of connector




1. Cut in specific location




2. Infuse the gel in the end cap



3. connect the end cap and wait for air drying




1. Install with clips




2. Fix with screws


1. STRIP TO STRIP INSTALLATIONS




1. Cut the light strip from the cut point



2. Tear off the 3M glue behind the light strip




3. Put the COB light strip inside the crystal connector and press the iron piece down.




4. Test the light strip after pressing down the iron sheet, the installation is complete


2. STRIP TO WIRE INSTALLATIONS



1. Prepare the dedicated cable for the crystal connector



2. Put the light strip and cable into the crystal connector and press down the iron piece



3. Installation is complete, test the light strip

Accessories:




Crystal Connector



Cautions




When install the led strip, please note the installation technique. The led strip can be bent, but not distorted, as shown below.

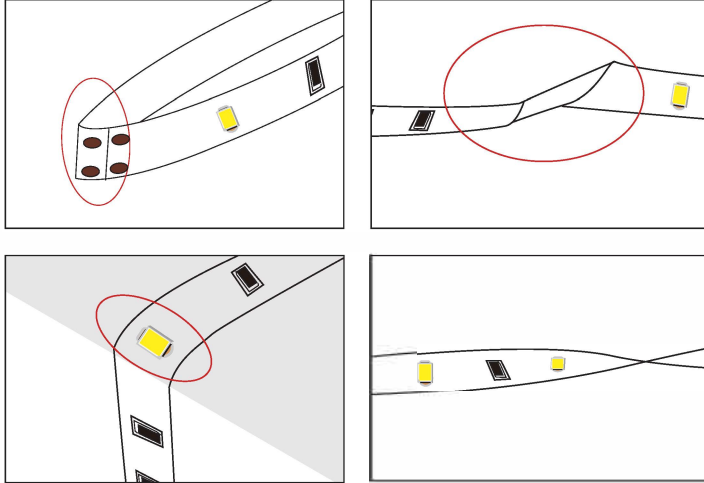

Distortion(Wrong)


LED strips are low voltage products, you must use the power supply(transformer). Please don't connect the led strip directly to the AC 110v or AC 220v, otherwise it will burn out the LED strips.

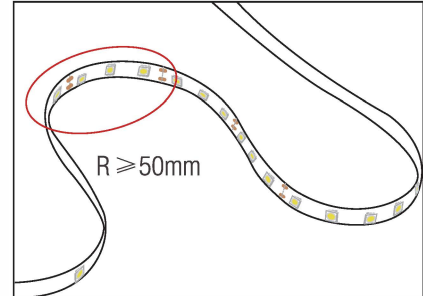

Bend(Right)

Clean up the installation surface, it will ensure the reliability of the adhesive. The electrical connection process must be operated by a professional person.

Packing :

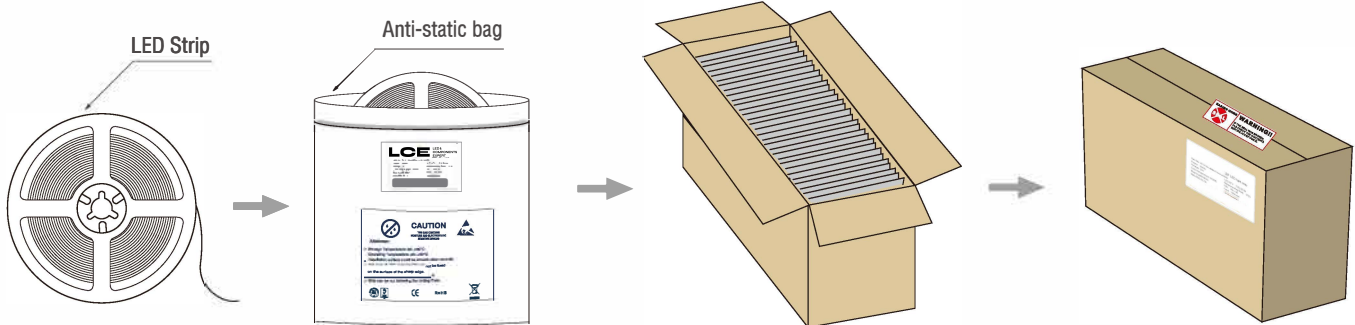

Notice:

- 1、 Please apply different IP rate products according to different environment conditions;
- 2、 Adopt suitable power supply to match the LED strips. Power is 20% bigger than max power of LED strips to ensure long time performance of power supply;
- 3、 Do not install it when power is on. Before powering on, please make sure the wiring is correct;
- 4、 Avoid privately changing or damaging the circuit or other component on the strip;
- 5、 Avoid scrape or bending during installation, it might be damaged with non repairable status;
- 6、 Strip linked in over long length would lead to problem of overload or uneven brightness;
- 7、 To protect your eyes, do not stare at the light for a long time while it's illuminated;
- 8、 Only professional personnel can install, dismantle and repair;
- 9、 Choose different connectors and controllers according to your different strip.